



YOUR PROJECT IS

Our Project



PRODUCT GUIDE



YOUR PROJECT IS *Our Project*

If you're the type of person who:

- Shop vacs every stud bay
- Busts out the laser level to align the toilet paper holder
- Cleans under the appliances
- Answers the phone

... then we think Sashco is right for you.

If, however, you:

- Leave chicken bones in areas the homeowner will never see
- Have rat's nests of wires behind every switch
- Avoid cleaning out the duct work
- Say "because I've always done it that way"

... could you do us a favor and hand this catalog off to a friend?


FIND YOUR *Project*

4-5	Sashco Means ...
6-9	For Every Job
10-13	Roofing
14-17	Windows, Doors & Siding
18-21	Kitchen & Bath
22-25	Mortar & Stucco
26-29	Concrete
30-33	Color Galore
34	Product Reference Guide
35	Zero Failures

Talk to Real People. +

Call us toll free at 800-767-5656. Customer Service Representatives are available to answer your questions Monday-Friday 7:00 AM to 5:00 PM Mountain Time.

Or, contact us at: sashco.com/contact



Follow and tag us!
ON SOCIAL MEDIA!
@sashcoinc



Sashco Means ... *Durability*

At Sashco, we buck the notion that caulking failure is the norm.
It's not. We are obsessively focused on creating quality sealants.

That's why we don't make good, better, best —
only high-performance sealants for every project.

ALL SASHCO SEALANTS ARE:

- ✓ In high-performance packaging
- ✓ Paintable*
- ✓ Capped with a stop-flow plunger
- ✓ Freeze-thaw stable
- ✓ Elastic
- ✓ Repairable (sticks to itself)
- ✓ Back by limited lifetime warranty
- ✓ Made in the USA

* Paint will interfere with enzymes in Clean® Seal



LEARN MORE ABOUT WHAT HIGH PERFORMANCE MEANS

Dripless Delivery

... Less on your jeans,
more in the joint.

Screw-On Nozzle

... Easily puncture
foil seal
or use with your
favorite nozzle.

High- Performance Packaging

... 3-5 year shelf life.

Freeze-Thaw Stable Formula

... So you don't have
to worry about
product in the truck.

10.5 oz. Fill

... Up to 17% more product
in each cartridge.





Lexel®

THE TOUGH ELASTIC SEALANT FOR *Every Job*

Lexel® is the tough elastic sealant for every interior and exterior job. It has superior adhesion to almost any surface, wet or dry, and is instantly waterproof! Lexel is extremely elastic and has 747% maximum elongation so it won't crack over time, meaning you only need to do a job once. It is paintable, sticks to itself and is crystal clear. In fact, it is 19 times clearer than silicone and won't yellow or get cloudy over time. Best yet, you never have to worry about leaving Lexel in your truck or garage since it won't freeze. After all, no one likes to waste a cartridge of sealant. Lexel truly is the only sealant you need in your toolbox; it won't let you down.

Features & Benefits

- ✓ Highly elastic – 747% maximum stretch
- ✓ Sticks to difficult surfaces, even when wet
- ✓ 19 times clearer than silicone
- ✓ Instantly waterproof
- ✓ All-weather formula
- ✓ Paintable
- ✓ Excellent UV resistance
- ✓ Permanently flexible
- ✓ Strong tear resistance
- ✓ Won't freeze in package
- ✓ Exclusive stop-flow feature
- ✓ Full 10.5 oz. in every cartridge
- ✓ Mold and mildew resistant

Application Basics

Dry Time

Weather resistant:
Immediately

Paintable:

1-2 days with water-based paint
3-4 weeks with oil-based paint

Full cure:

1 week (depending on temperature and humidity)

Cleanup / Removal

Tools: Mineral spirits or paint thinner

Hands: Citrus-based cleaners

Application Range


0° to 120°F (-18° to 49°C)

Service Range

-30° to 200°F (-34° to 93°C)

Performance **AT A GLANCE**

	Lexel	Leading Offset
Elongation to break (%)	747%	295%
Tensile Strength (PSI) (lower is better)	21	64
Adhesion (PLI) (average of 7 surfaces wet and dry)	23.6	8.1

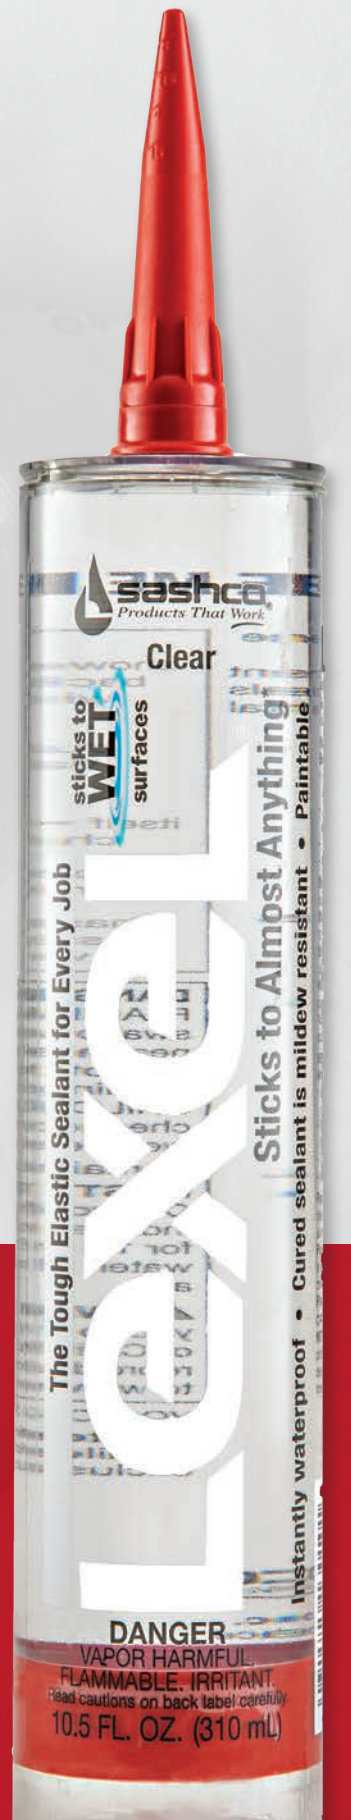



Compatible With

Lexel is excellent for almost every indoor and outdoor application, including:

- Building Materials**
 - ✓ Asphalt
 - ✓ Alkyd stain
 - ✓ Brick
 - ✓ Canvas
 - ✓ Ceramic
 - ✓ Concrete
 - ✓ Corian®*
 - ✓ Drywall
 - ✓ EIFS
 - ✓ Fiberglass
 - ✓ Glass
 - ✓ Laminate tops
 - ✓ Mortar
 - ✓ Paint
 - ✓ Porcelain
 - ✓ Stone
- Stucco**
 - ✓ Tile
 - ✓ Vinyl
 - ✓ Wood
- Metals**
 - ✓ Aluminum
 - ✓ Brass
 - ✓ Copper
 - ✓ Galvanized steel
- Plastics**
 - ✓ ABS
 - ✓ Acrylic sheet
 - ✓ Nylon
 - ✓ Polycarbonate
 - ✓ PVC
 - ✓ DuxxBak®*

Where NOT to Use

Adhesion is poor on the following substrates. A test patch is recommended:

- Aquaseal®*
- Cultured marble
- Kynar®*
- Teflon™* coatings
- Polypropylene
- Polyethylene
- Silicone
- Waxes

Lexel has excellent adhesion on these surfaces, but it can wrinkle or discolor them. A test patch is recommended:

- EPDM
- Vulcanized rubber
- TPO

Do not use on:

- Polystyrene foam insulation (Lexel will dissolve it)

Plastics not listed should be tested for compatibility before use. *Aquaseal®, Kynar®, Corian®, Teflon™, and DuxxBak® are registered trademarks of their respective owners.

A Product Case Study

THE SCENARIO

Cole is a homesteader based out of Ogden, Iowa. He applied Lexel on his barn in 2018. During that 2018 application, he ran out of Lexel and relied on a different product to complete the job. We checked how the sealants were doing in the late summer of 2022. See the durability differences in the pictures below:



THE PROOF IS *in the goop.*

I used the Lexel just to seal that seam to keep the water from getting into the barn. I ran out of product ... and you can tell where I used another product that's supposed to be similar. It's a lot more brittle and didn't hold up.

Now, I keep enough Lexel on hand to ensure that I won't run out, no matter what job I'm doing.
— Cole Hoffman

Sticks
TO MOST ANYTHING




Did You Know?

Lexel won't freeze. Go ahead – leave it in the truck overnight.

Questions?

- Call us: 800-767-5656
- Contact us: sashco.com/contact

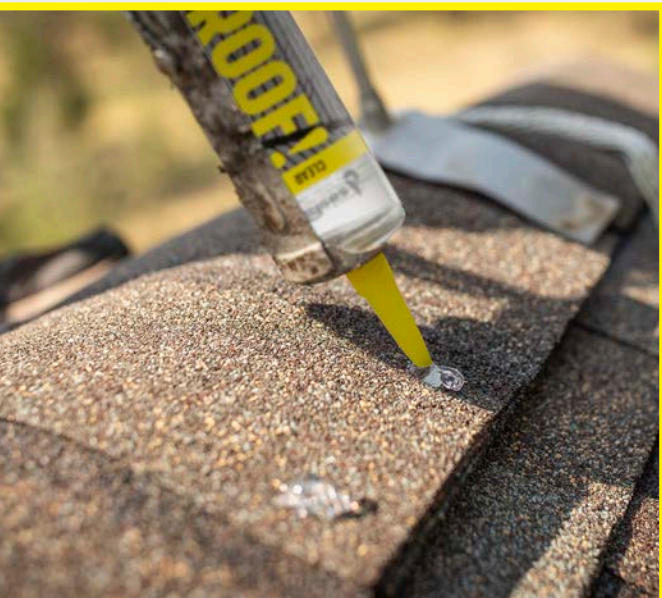

ROOFS • VENTS • SKYLIGHTS
GUTTERS • FLASHING

Through the **ROOF!**

Seals Leaks
ASPHALT CAN'T

When there's a nagging roof leak that others can't fix, or when you don't want to take your chances, use Through the Roof!® Its unique copolymer rubber formula creates a permanent, invisible seal, even when applied in the middle of a rain storm. (It works great on dry surfaces, too.) Through the Roof! will stick to almost any roofing surface – metal, plastic, asphalt, wood, concrete, and more. Plus, it won't freeze. So go ahead and fix that gutter in a Minnesota winter. You might get some concerned stares from your neighbors, but they'll be grateful the next time you host the neighborhood party and their heads stay dry.

Features & Benefits

- ✓ Superior bond durability
- ✓ Humidity & rainproof
- ✓ All-weather formula
- ✓ Sticks to wet surfaces
- ✓ Excellent UV resistance
- ✓ Brush-on formula (available in quart or gallon containers)
- ✓ Crystal clear (19 times clearer than silicone)
- ✓ Sticks to difficult surfaces
- ✓ Super elastic – 657% maximum stretch
- ✓ Permanently flexible & elastic
- ✓ Strong tear resistance
- ✓ Exclusive stop-flow feature
- ✓ Won't freeze in package
- ✓ Full 10.5 oz. in every cartridge
- ✓ Mold and mildew resistant
- ✓ Paintable

Application Basics

Dry Time

Weather resistant:
Immediately

Full cure:

1 week (depending on temperature and humidity)

Cleanup / Removal

Tools: Mineral spirits or paint thinner

Hands: Citrus-based cleaners

Application Range

0° to 140°F (-18° to 60°C)
(cartridge)

0° to 120°F (-18° to 49°C)
(brush)

Service Range

-30° to 200°F (-34° to 93°C)

Performance **AT A GLANCE**

	Through the ROOF!	Leading Offset
Elongation to break (%)	657%	264%
Tensile Strength (PSI) (lower is better)	193	293
Adhesion (PLI) (average of 4 surfaces wet and dry)	27.0	17.8






COBRA

Lap Joint Nozzle
Fast & Deadly Accurate

LAP JOINTS MADE EASY

Fast AND DEADLY ACCURATE

You need a flat caulk bead, but you have a round nozzle. How does that make sense? That's what we thought. We bring you the right tool, the Cobra Nozzle®. It extrudes a wide bead to easily cover all kinds of lap joints, like roof flashing and window fins, and sandwich joints like thresholds. It comes with a 6-pack of Through the Roof!® clear sealant, well-known for fixing and preventing leaks. Together they help you do your best work. Your customers will think so, too.

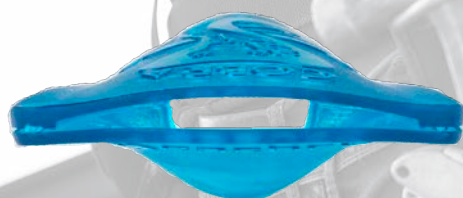

Description	Item #	Case Pack	Item UPC
10.5 oz. Clear	14010	12	031525140100
1.8 Pints Clear	14003	6	031525140032
1 Quart can Clear - VOC	14023	6	031525140230
1 Gallon pail Clear	14004	2	031525140049
1 Gallon pail Clear - VOC	14024	2	031525140247
10.5 oz. Black	14060	12	031525140605
10.5 oz. Black - VOC	14065	12	031525140650
10.5 oz. White	14030	12	031525140308
10.5 oz. White - VOC	14035	12	031525140353
Cobra 6-Pack	14026	1	031525140261



+ *Did You Know?*
Through the Roof! seals active leaks.

Questions?
• Call us: 800-767-5656
• Contact us:
sashco.com/contact

Compatible With

For repairs that stick, but won't stick out, use Through the Roof! on common roofing fixtures, including:

- ✓ Aluminum
- ✓ Steel
- ✓ Ceramic tile
- ✓ Stucco
- ✓ Brass
- ✓ Acrylic & polycarbonate skylights
- ✓ Concrete
- ✓ Terra cotta
- ✓ Copper
- ✓ Glass
- ✓ Tile
- ✓ Galvanized steel
- ✓ Mortar
- ✓ Vinyl
- ✓ Powder-coated metals
- ✓ Brick
- ✓ Polyisobutylene
- ✓ Wood
- ✓ Asphalt shingles
- ✓ Stone

Where NOT to Use

Adhesion is poor on the following substrates. A test patch is recommended:

- Silicone
- Aquaseal®*
- Kynar®*
- Teflon™ coatings
- Polypropylene
- Polyethylene
- Waxes
- TPO

Through the Roof! has excellent adhesion on these surfaces, but it can wrinkle them. A test patch is recommended:

- EPDM
- Vulcanized rubber

Do not use on:

- Polystyrene foam insulation

Plastics not listed should be tested for compatibility before use.

**Aquaseal®, Kynar® and Teflon™ are registered trademarks of their respective owners.*





WINDOWS • DOORS • SIDING
SOFFITS • BASEBOARDS
CROWN MOLDING • VENTS
SOUNDPROOFING WALLS
INTERIOR TRIM

Big Stretch®

WON'T CRACK ...

It just stretches

All homes move. They move when the wind blows, the temperature changes, or the ground shifts. When caulking cracks, you can lose the air or moisture barrier in your home. That's why you need Big Stretch®.

With powerful adhesion and extreme elasticity, it will stick, twist, bend, compress, and stretch — 530% maximum stretch — to handle most any movement your home can dish out, all without cracking.



Features & Benefits

- ✓ Super elastic – 530% maximum stretch
- ✓ Powerful adhesion to a wide variety of surfaces
- ✓ Permanently flexible
- ✓ Water-based – easy to tool and clean up
- ✓ Superb paintability, won't cause paint gloss
- ✓ Performs well in humid and arid climates
- ✓ Freeze-thaw stable
- ✓ Excellent UV resistance
- ✓ Exclusive stop-flow plunger
- ✓ Full 10.5 oz. in every cartridge
- ✓ Nationally VOC compliant
- ✓ Spans gaps up to 2" wide with no sag

PRO Tips

Tooling a sealant and ending up with most of the caulking on your finger instead of in the joint is like hammering a nail and then cutting off the head.

A big bead of sealant isn't poor workmanship – it'll be more durable than a small bead. To get a really nice looking bead, lightly mist the bead and your finger with water (or clear window cleaner for solvent-based products). Then use a light, skimming touch to form the bead to the shape you want ... leaving most of the caulking in the joint.





Application Basics

Dry Time:
Paintable:
4 hours with exterior painting
1-2 days with interior paints
1 week with oil-based paints

Weather resistant:
1-2 days (depending on temperature and humidity)

Full cure: 4-5 days (depending on temperature and humidity)

Application Range
40° to 120°F (4° to 49° C)

	Description	Item #	Case Pack	Item UPC
	10.5 oz. White	10016	12	031525100166
	10.5 oz. Clear	10006	12	031525100067
	10.5 oz. Gray	10010	12	031525100104
	10.5 oz. Slate Gray	10026	12	031525100265
	10.5 oz. Sandstone	10080	12	031525100807
	10.5 oz. Charcoal Gray	10084	12	031525100845
	10.5 oz. Almond	10002	12	031525100029
	10.5 oz. Tan	10014	12	031525100142
	10.5 oz. Redwood	10012	12	031525100128
	10.5 oz. Dark Brown	10008	12	031525100081
	10.5 oz. Woodtone	10018	12	031525100180
	10.5 oz. Steel Blue	10082	12	031525100821
	10.5 oz. Black	10004	12	031525100043
	30 oz. White	10086	10	031525100869

Service Range
-30° to 250°F (-34° to 121°C)

Specifications
FHA
TTS-0023 C
ASTM C834
ASTM C920 Class 25

Cleanup / Removal
Soap and water

Where NOT to Use

- In submersion applications
 - Walking or driving surfaces
- Adhesion is poor on the following substrates. A test patch is recommended:
- Kynar®*
 - Polypropylene Waxes
 - Polyethylene
 - Silicone

Compatible With

Big Stretch adheres to most building materials including:

- ✓ Aluminum
- ✓ Brass
- ✓ Steel
- ✓ Anodized windows
- ✓ ABS
- ✓ Lexan®*
- ✓ Acrylic sheet
- ✓ Plexiglass
- ✓ PVC
- ✓ Fiberglass
- ✓ Urethane
- ✓ Vinyl
- ✓ Polycarbonate
- ✓ Polystyrene
- ✓ Nylon
- ✓ Asphalt
- ✓ Tile
- ✓ Cinder block
- ✓ Corian®*
- ✓ Wood
- ✓ Formica®*
- ✓ Glass
- ✓ Mortar
- ✓ Hot melt butyl
- ✓ Stucco
- ✓ Brick
- ✓ Concrete
- ✓ Stone
- ✓ EIFS
- ✓ Fiber cement
- ✓ Drywall



*Formica®, Corian®, Kynar® and Lexan® are registered trademarks of their respective owners.

Did You Know?

Good air sealing not only reduces the heating/air conditioning bill, it makes the home quieter, more comfortable, and less likely to have insect issues.

Questions?

- Call us: 800-767-5656
- Contact us: sashco.com/contact



Performance AT A GLANCE

	Big Stretch	Leading Offset
Elongation to break (%)	530%	275%
Tensile Strength (PSI) (lower is better)	21	55
Adhesion (PLI) (average of 5 surfaces wet and dry)	15.4	10.4



COUNTERTOPS • TUBS • SINKS
BACKSPLASHES • SHOWERS
KITCHEN & BATHROOM FIXTURES

Clean® Seal

NO MOLD. NO MILDEW.

No scrubbing needed

Why do mold and mildew grow so quickly? Because you're feeding them! They feed on body oils, shower products, cooking oils, and bacon grease that collect in the corners of your shower and kitchen. That's why we created Clean® Seal, the first ever active enzyme caulk that breaks down these oils — eliminating their source. By taking away their food, we literally strip mold and mildew of their power to grow. Plus, unlike mildewcides and repellents that wear out over time, our enzymes are permanently active for long-lasting results!

Features & Benefits

- ✓ Active enzymes prevent mold and mildew growth before they start
- ✓ Super elastic
- ✓ Waterproof
- ✓ Easy to use – water cleanup
- ✓ Powerful adhesion to kitchen and bathroom surfaces
- ✓ Resilient surface withstands scrubbing and chemical cleaners
- ✓ Zero risk product and labor warranty program
- ✓ Exclusive stop-flow feature
- ✓ Full 10.5 oz. in every cartridge

*Sashco's promise is 'Products That Work'. We will actually pay someone to re-caulk for you if mold grows on properly installed Clean Seal or it otherwise fails in the first 7 years after purchase. Proof of purchase is required. Warranty applies to single family residential only; no other warranties are implied. Sashco will not be responsible for consequential damages other than product reinstallation. For more information, see sashco.com/legal.

	Description	Item #	Case Pack	Item UPC
	6 oz. White	11070	12	031525110707
	6 oz. Almond	11071	6	031525110714
	10.5 oz. White	11073	12	031525110738

Performance AT A GLANCE

	Clean Seal	Leading Offset
Elongation to break (%)	411%	398%
Tensile Strength (PSI) (lower is better)	37	106
Adhesion (PLI) (average of 4 surfaces wet and dry)	15.5	15.8





Application Basics

Dry Time
Water resistant:
 2-3 days

Full cure:
 4-5 days (depending on temperature and humidity)

Paintable:
 Paint will interfere with enzymes in Clean Seal

Cleanup / Removal
 Soap and water

Application Range
 40° to 100°F (4° to 49° C)

Service Range
 0° to 115°F (-18° to 46°C)

Specifications
 FHA
 ASTM C834

PRO Tips

The Tile Council of North America specifies that any change in substrate, backing surface, or plane requires the use of a caulking instead of a grout.

Sealants should be used in these instances because the surfaces can move independently. They recommend against the use of acrylics, which may mold or break down, but Clean Seal is no ordinary acrylic. It's built specifically for this application.

Where NOT to Use:

- Areas submerged with water pressure, such as pools, drains, hot tubs or saunas.
- Copper (use Lexel instead)
- Brass (use Lexel instead)
- Polypropylene
- Waxes
- Polyethylene
- Silicone



Compatible With

Adheres to a variety of building materials and other surfaces, including:

- | | | |
|------------|-------------------------|----------------|
| ✓ Glass | ✓ Plastics | ✓ Concrete |
| ✓ Marble | ✓ ABS | ✓ Porcelain |
| ✓ Granite | ✓ PVC | ✓ Formica®* |
| ✓ Drywall | ✓ Vinyl | ✓ Slate |
| ✓ Wood | ✓ Plexiglass | ✓ Corian®* |
| ✓ Aluminum | ✓ Acrylic Sheet | ✓ Ceramic tile |
| ✓ Nickel | ✓ Fiberglass (uncoated) | |
| ✓ Steel | | |

*Corian® and Formica® are registered trademarks of their respective owners.



Gross. Shoulda Used Clean Seal.



Questions?

- Call us: 800-767-5656
- Contact us: sashco.com/contact



Did You Know?

Mold and mildew feed on natural oils, like body oils and shower products in the bathroom and grease build-up in the kitchen.



BRICK & MORTAR REPAIR
STUCCO REPAIR
BRICK-SIDING TRANSITIONS
STONE CLADDING

Mor-Flexx®

TEXTURED LIKE MORTAR

*Stretches
Like Rubber*



It's ugly. Your mortar cracks and your stucco streaks.

Replacement and repeated repairs re-crack, not to mention that they're costly and time-consuming. Forget



the concrete powder, mix bucket, and big trowel. Just squeeze in Mor-Flexx® to repair crumbly mortar, cracked stucco, or textured walls. It's easy, it's fast, and it works. Mor-Flexx is textured to blend seamlessly with mortar and stucco, yet is elastic like rubber, able to span cracks for years-long repairs. With Mor-Flexx, no one will know you had an unsightly crack, including you.



Features & Benefits

- ✓ Repair without the powder
- ✓ Easy to use – water cleanup
- ✓ Weatherproof
- ✓ Textured to look like mortar and stucco
- ✓ Won't crack like mortar and stucco
- ✓ Performs well in all weather and climates
- ✓ Sticks like crazy to masonry
- ✓ Exclusive stop-flow feature
- ✓ Paintable
- ✓ Freeze-thaw stable in package
- ✓ Full 10.5 oz. in every cartridge
- ✓ Use in joints up to 2" wide with no sag
- ✓ Nationally VOC compliant

PRO Tips

“Can I use this on a fireplace?” The answer is “yes” as long as it’s a decent distance from the flame.

Mor-Flexx can handle up to about 250°F. A fire will burn anywhere between 500-1100°F. If you can touch it, you can caulk it. Or, if you have a thermometer lying around, you can use that to figure out how hot the bricks get.

Performance AT A GLANCE

	Mor-Flexx®	Leading Offset
Elongation to break (%)	150%	188%
Tensile Strength (PSI) (lower is better)	24	95
Adhesion (PLI) (6 surfaces - dry only)	9.3	5.5





Description	Item #	Case Pack	Item UPC
10.5 oz. Beige	15010	12	031525150109
10.5 oz. Gray	15020	12	031525150208
10.5 oz. Charcoal	15040	12	031525150406
10.5 oz. Ironstone	15030	12	031525150307
10.5 oz. White	15016	12	031525150161



Compatible With

- ✓ Mortar
- ✓ Stucco
- ✓ Stone
- ✓ Concrete
- ✓ Brick
- ✓ Composite stone
- ✓ Cinder block
- ✓ Wood
- ✓ Aluminum
- ✓ Anodized windows
- ✓ Architectural foam
- ✓ Brass
- ✓ Drywall
- ✓ Fiber concrete
- ✓ PVC
- ✓ Steel
- ✓ Tile
- ✓ Vinyl



Application Basics

Dry Time

Paintable: 4 hours with exterior water-based paints
1 week with oil-based paints

Full cure: 4-5 days (depending on temperature and humidity)

Cleanup/Removal
Soap and water

Application Range

40° to 120°F
(4° to 49°C)

Service Range

-30° to 250°F
(-34° to 121°C)

ASTM Specifications

ASTM C834
ASTM G53 QUV:
4000 hours
ASTM D638 Max 250%
ASTM C920 Class 12.5

Where NOT to Use

- On concrete less than 6 months old; the concrete is not fully cured
- Areas of constant water submersion or frequent, prolonged puddling
- Areas with high foot and/or vehicle traffic (driveways, sidewalks, decks, patios, etc.) For areas with high foot traffic, use Slab.
- Areas where hydrostatic resistance is wanted

Will not adhere to or is incompatible with:

- Kynar®*
- Polypropylene
- Waxes
- Polyethylene
- Silicone

*Kynar® is a registered trademark of its respective owner.

Did You Know?

Mor-Flexx matches many composite stone patterns. Use it to get a realistic looking seal.

Questions?

- Call us: 800-767-5656
- Contact us: [sashco.com/contact](https://www.sashco.com/contact)





DRIVEWAYS • SIDEWALKS
PATIOS • EXPANSION JOINTS
GARAGES

Slab®

THE SERIOUS FIX FOR *Concrete cracks*

Step outside and you're likely to see a concrete crack in less than two seconds flat. They're in driveways, sidewalks, garages, patios, pool decks, and basements. Cracks harbor weeds and anthills, and cause toe injuries (ouch!). They're eyesores that never seem to go away. Changes in temperature, moisture, shifting soils, and traffic only make them worse. Enough is enough! Just say "no" to cracks. Use Slab® – The Serious Fix for Concrete Cracks. Slab is an easy-to-apply, water-based sealant that stretches up to 266% of original crack size! Your knees and back will thank you for using a product that won't require repeated repairs year after year. Slab sticks, stretches, and stays to banish concrete cracks for good.

Features & Benefits

- ✓ Textured to look like concrete
- ✓ Sticks. Stretches. Stays.
- ✓ Sticks like crazy to concrete
- ✓ Super elastic
- ✓ Easy to use – water cleanup
- ✓ Freeze-thaw stable in package
- ✓ Exclusive stop-flow feature
- ✓ Full 10.5 oz. in every cartridge
- ✓ Nationally VOC compliant

Compatible With

- ✓ Concrete[†]
- ✓ Asphalt*
- ✓ Brick
- ✓ Cinder block
- ✓ EIFS (Cured)
- ✓ Mortar
- ✓ Stone
- ✓ Stucco
- ✓ Wood
- ✓ Vinyl

[†]Concrete must be cured at least 6 months.

*Be aware that asphalt is a weak substrate. Slab will hold its seal, but the asphalt may lose adhesion to itself over time.

Where NOT to Use

Will not adhere to or is incompatible with:

- Kynar®**
- Polyethylene
- Polypropylene
- Silicone
- Waxes

**Kynar® is a registered trademark of its respective owner.

Performance AT A GLANCE

	Slab®	Leading Offset
Elongation to break (%)	266%	171%
Tensile Strength (PSI) (lower is better)	28	249
Adhesion (PLI) (to concrete)	15	15





Application Basics

Dry Time
Weather resistant:
5-6 days

Full cure:
1 week (depending on temperature and humidity)

Paintable:
1 day for water-based paints
Full cure for oil-based paints or epoxies

Cleanup / Removal
Soap and water

Application Range
40° to 120°F (4° to 49°C)

Service Range
-30° to 250°F (-34° to 121°C)

Specifications
FHA
TTS 00230C
ASTM C834

Description	Item #	Case Pack	Item UPC
10.5 OZ. Gray	16210	12	031525162102
3/8"x20' Filler Rope	30100	12	031525301006
5/8"x20' Filler Rope	30110	12	031525301105
1 1/8"x20' Filler Rope	30120	12	031525301204




PRO Tips

Backer rod provides 3 benefits:

1. It serves as a “bond breaker” between a third side of a joint, allowing the sealant to move freely – as it’s designed to do.
2. It creates the ideal geometry for a sealant – an hourglass like shape. The hourglass shape maximizes the surface area for adhesion and yet leaves the sealant thin to be able to move in the center.
3. It saves money by using less sealant.

To choose the right size backer rod for your job, keep 3 things in mind:


1. You want at least ¼" of sealant depth to the face of the backer rod to ensure the sealant is thick enough.
2. The diameter of the backer rod should be roughly the same size — or slightly larger — than the size of the joint.
3. Backer rod will compress a bit so putting ⅝" backer rod into a ½" gap won't be a problem.

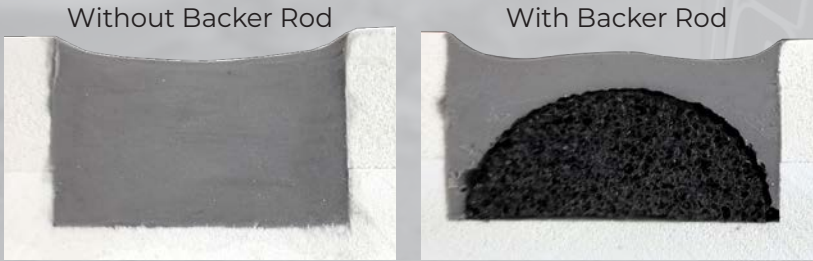

Filler Rope

Soft Cell Backer Rod with Water-Resistant Skin

Filler Rope combines the best of both open-cell and closed-cell backer rods. It is soft and pliable so that it can easily fit into an uneven crack. It also repels water to protect the crack from damage.

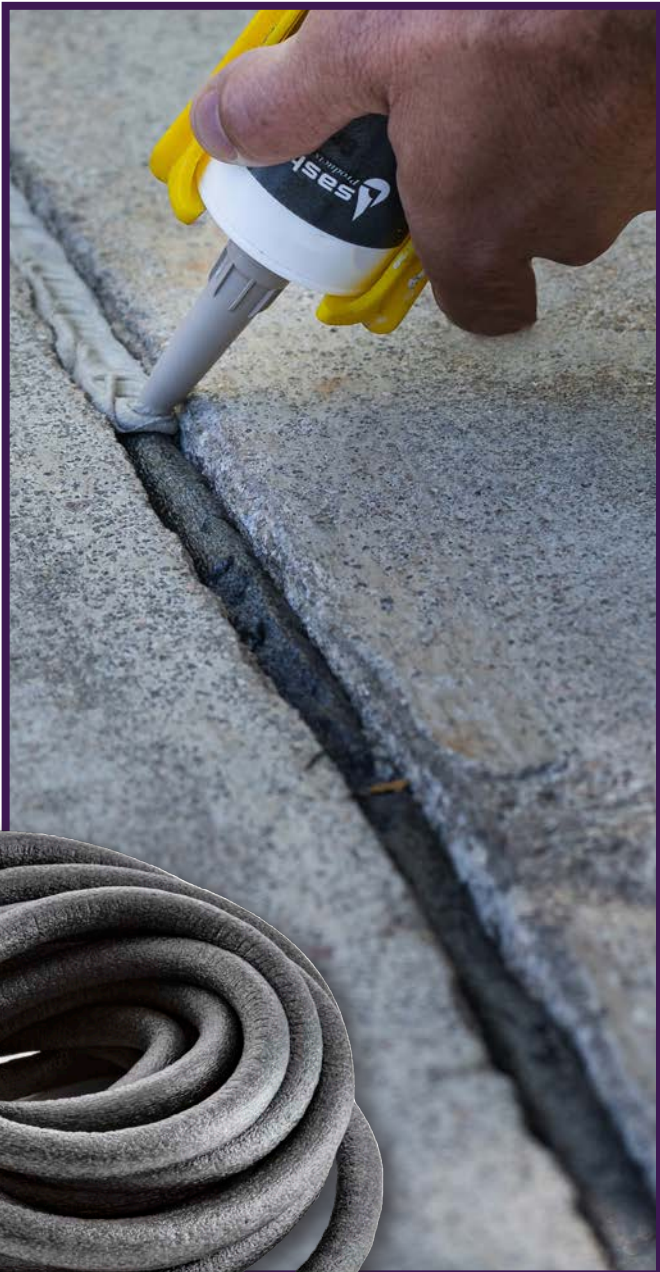

Where to Use

Use filler rope on joints deeper than 1/2". When the joint is smaller than that, just use the sealant.



Did You Know?

Unlike many concrete sealants, Slab is not self-leveling. This means that you can use it in vertical applications such as stairs, as well as when the concrete isn't perfectly level.

Questions?

- Call us: 800-767-5656
- Contact us: [sashco.com/contact](https://www.sashco.com/contact)



SIDING • CABINETS • TRIM
COUNTERTOPS • BACKSPLASHES
STAINED WOODWORK

eXact Color
Sealant

TINTABLE CAULK


Just add paint

eXact Color® is the easiest and fastest way to create a custom color caulk. This 100% water-based acrylic sealant requires no special tools. Simply mix in any water-based paint, stain, or universal pigments to get an exact match. Forget about needing to have 50+ colors on hand. You only need this one to match your job.

ACHIEVE A *seamless match*
ON ANY OF THESE PROJECTS!

Features & Benefits

- ✓ A seamless match, every time
- ✓ Match stains or even metallics
- ✓ No special tools required
- ✓ Easy to use – water cleanup
- ✓ Super elastic
- ✓ Permanently flexible
- ✓ Powerful adhesion
- ✓ Exclusive stop-flow plunger
- ✓ Delivers 10.5 oz. of tinted product
- ✓ Nationally VOC compliant

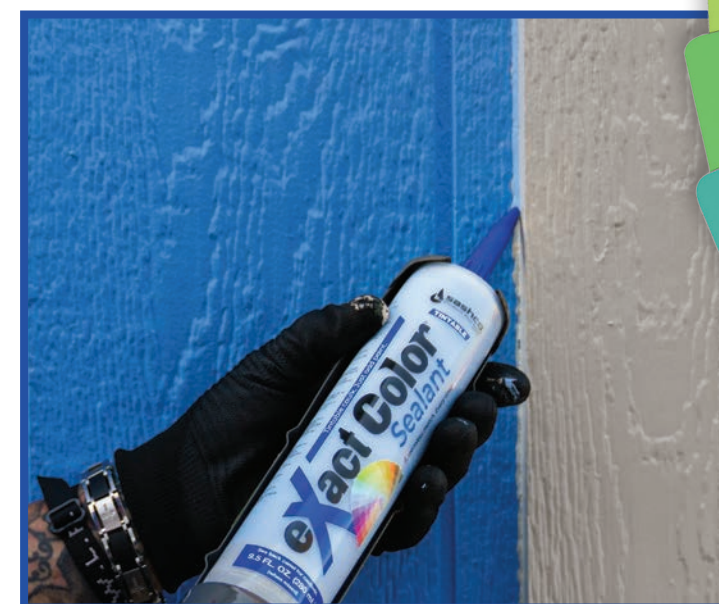



- 1  Cut
- 2  Inject
- 3  Shake
- 4  Thicken
- 5  Shake
- 6  Wait
30 mins.
- 7  Caulk

Application Basics

Dry Time

Weather resistant:

1-2 days

Full cure:

4-5 days (depending on temperature and humidity)

Paintable:

Um? Feels like you're missing something here.

You mix the paint in, so you shouldn't need to paint it!

Cleanup / Removal

Soap and water

Application Range

40° to 90°F (4° to 32°C)

Service Range

-30° to 250°F (-34° to 121°C)

Where NOT to Use

- Areas of water submersion or frequent, prolonged puddling
- Areas with high foot and/or vehicle traffic (driveways, sidewalks, decks, patios, etc.)
- Roofs exposed to prolonged dampness (use Sashco's Through the Roof! instead)
- Will not adhere to or is incompatible with:
 - Kynar®*
 - Polypropylene
 - Waxes
 - Polyethylene
 - Silicone.
- May discolor copper

**Kynar® is a registered trademark of its respective owner.*

Description	Item #	Case Pack	Item UPC
Contractor 6-Pack	12005	1	031525120058
DIY Kit	12030	6	031525120300



Compatible With

Adheres to a variety of building materials and other surfaces, including:

- ✓ ABS
- ✓ Acrylic sheet
- ✓ Aluminum
- ✓ Anodized windows
- ✓ Asphalt
- ✓ Brass
- ✓ Brick
- ✓ Cinder block
- ✓ Concrete
- ✓ Corian®*
- ✓ Drywall
- ✓ Fiber cement
- ✓ Fiberglass
- ✓ Formica®*
- ✓ Glass
- ✓ Mortar
- ✓ Nylon
- ✓ Polycarbonate
- ✓ Polystyrene
- ✓ Porcelain
- ✓ PVC
- ✓ Steel
- ✓ Stone
- ✓ Stucco
- ✓ Tile
- ✓ Urethane
- ✓ Vinyl
- ✓ Wood

**Corian® and Formica® are registered trademarks of their respective owners.*



Performance AT A GLANCE

	eXact Color Sealant	Leading Offset
Colors	∞	364

Did You Know?










Paint often fades at a different rate than color-matched caulks. eXact Color's match will last through UV exposure.

Questions?

- Call us: 800-767-5656
- Contact us: sashco.com/contact

The Sashco Lineup *at a glance*

Still reading? **We're impressed.**

							
	Lexel	Through the Roof!	Big Stretch	Clean® Seal	Mor-Flexx	Slab	eXact Color
Technology	Copolymer	Copolymer	100% Acrylic	100% Acrylic	100% Acrylic	100% Acrylic	100% Acrylic
Colors available	Clear, White	Clear, White, Black	White, Clear, Gray, Slate Gray, Sandstone, Charcoal Gray, Almond, Tan, Redwood, Dark Brown, Wood-tone, Steel Blue, Black 	White, Almond	White, Gray, Charcoal, Ironstone, Beige 	Gray	Any water-based paint or stain you can find
Paintable?	✓	✓	✓		✓	✓	✓
Sticks when wet?	✓	✓					
Cleanup	Mineral spirits or citrus-based cleaner	Mineral spirits or citrus-based cleaner	Soap and water	Soap and water	Soap and water	Soap and water	Soap and water
Ideal for							
Roofing/gutters	✓	✓					
Siding			✓				✓
Kitchen	✓			✓			✓
Bathroom	✓			✓			✓
Windows & doors	✓		✓				
Trim/molding			✓				✓
Vents	✓	✓					
Driveways/sidewalks						✓	
Mortar/stone repair					✓		
Stucco					✓		
RVs	✓	✓	✓				
Sill plates	✓						
Ductwork/HVAC	✓						

You're invited to be a part of the Sashco story by joining us at **Zero Failures.**


Turns out, sealing the building envelope requires more than the nearest caulk, a lick and a promise. At Zero Failures, we go into the pros and cons of different sealant technologies, which work best in different applications, and how sealing the building envelope translates into delighted customers (and energy bill happiness).



All seminars are held at Sashco's new home office and factory in Thornton, CO. Check out seminar agendas, dates and costs at **sashco.com/zero-failures**.



Not to be caulky, but this is training that *works*.

 LEARN MORE ABOUT OUR SEMINARS!



YOUR PROJECT IS *Our Project*

14802 Grant St. | Thornton, CO 80601
sashco.com • 800-767-5656
HMLT131 521

Keep up with @SashcoInc on:

