

The Lift Gate Assistant by Weber Knapp is counterbalanced to provide a safe and easy open/close feature.

It has been specifically designed to lessen strain on users and provide a safer work environment. Lifting the gate can be accomplished with one finger and the gate won't fall even when partially open.

It is easily incorporated into new designs and can also be retrofitted in existing applications.




## Lift Gate Assistant Advantages

- · Designed to meet ADA Requirements \*
- · Counterbalances through the entire opening and closing range
- Smooth, consistent, counterbalanced motion prevents dropping and slamming
- Field Adjustable
- Rugged steel construction finished in durable black, white, or silver Powder Coat - Stainless Steel version is also available
- Cycle life 100,000 minimum
- MADE IN THE USA

LID WEIGHT

\*The stocked Lift Gate Assistant is designed for a wood access lid that is 40 inches long by 27 inches deep and has a 1-1/4 inch thickness. An oak access top with these dimensions has an approximate weight of 40 lbs. In order to meet ADA requirements, the access lid should be a minimum of 40 inches long.

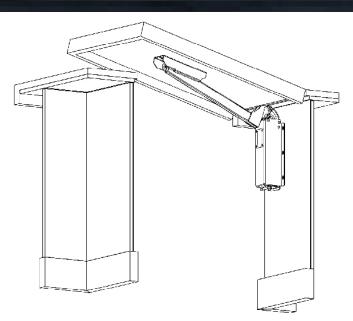

## **Weight Options**

Select the option best suited for your project:

Light range: 37-45 lbs

• Medium range: 61-71 lbs

Heavy range: 112-137 lbs\*

\*heavy range will require a dual counterbalance unit.

## **Order Specifications**

LID MATERIAL

LID SIZE

THICKNESS

WIDTH

LENGTH

