ELECTRIC F. E. I.

PRODUCT CATALOG

Metallic & Non-Metallic Outlet Boxes, Fiberglass Outlet Boxes, Extra-Duty Bubble Covers, Wiring Devices, Building Wire & Structured Cable, and Multifamily Lighting

A complete line of electrical products designed & manufactured by professionals




UL LISTED

CLASSIFIED UL 2-HR

ETL LISTED

ELECTRIC
F. E. I.

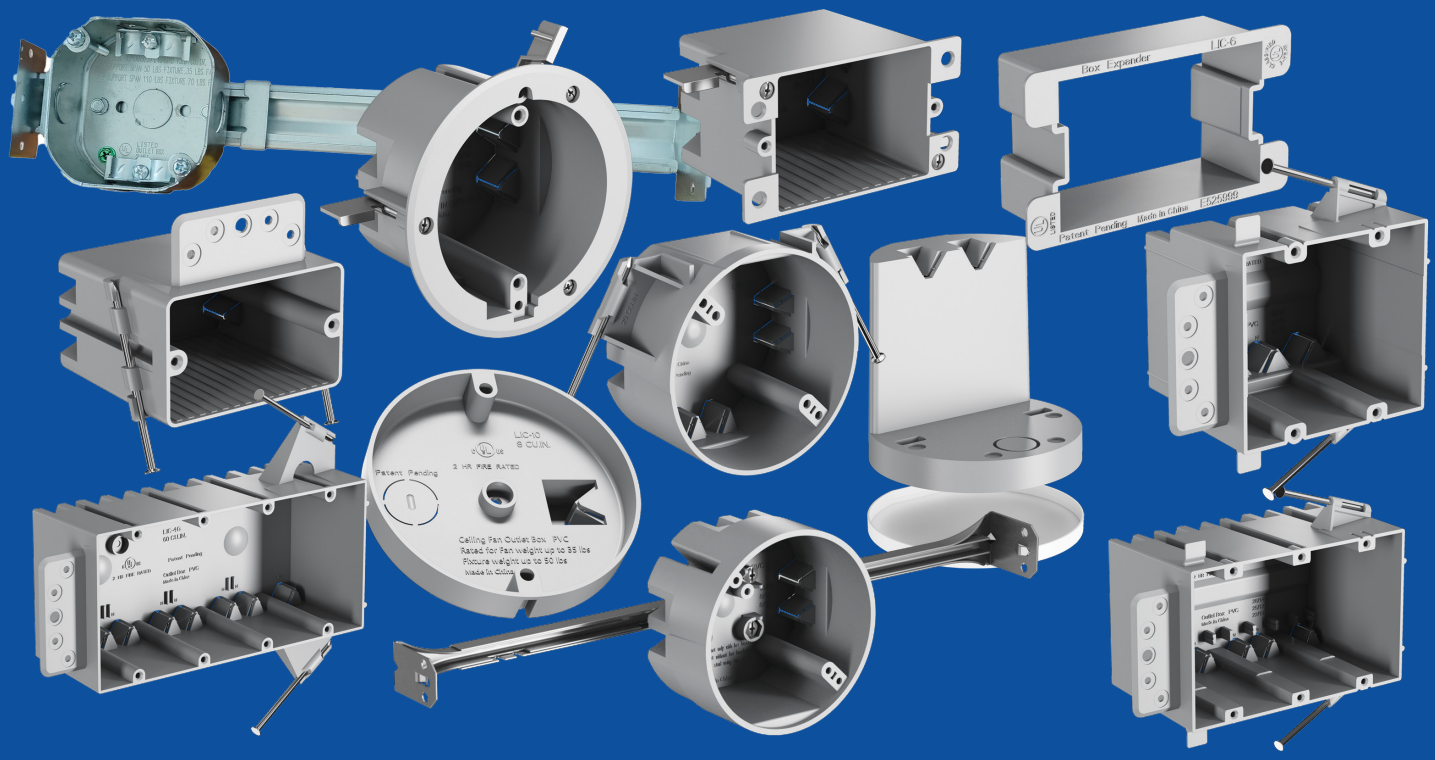

METALLIC & NON-METALLIC OUTLET BOXES


ELECTRIC
F. E. I.



ITEM NO. LIC-1G

1-Gang Non-Metallic Outlet Box

Scan for
Specifications

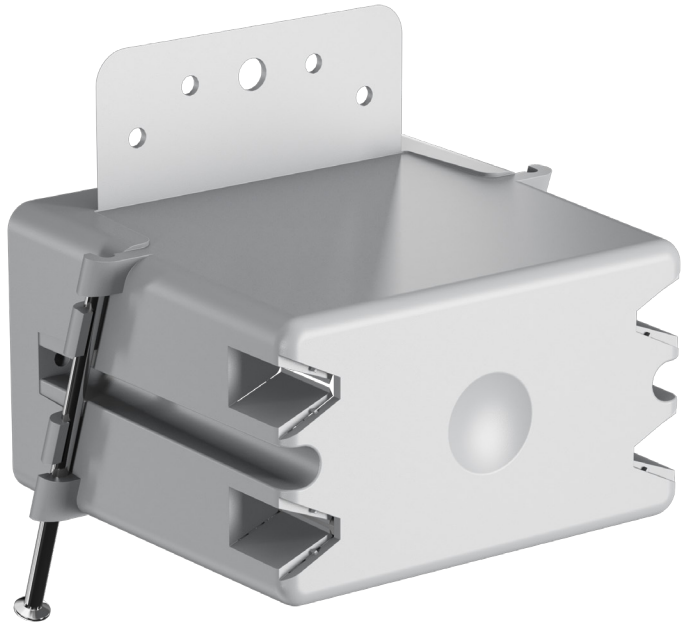

ITEM NO. LIC-1G

1-Gang Non-Metallic Outlet Box

Product Description:

1-Gang Non-Metallic Outlet Box

Application:

Mounts to wooden stud in new work residential applications.

Features:

- Nail holders allow for easy installation to wooden stud.
- Wall alignment bracket for easy placement and screw holes.
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.


Item No.	LIC-1G
Trade Code:	1-Gang
Volume:	22.5 CU. IN.
Type of Installation:	New Work
Height:	4.16 inches
Width:	3.5 inches
Depth:	3.45 inches

Certifications:

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

UL LISTED
CLASSIFIED UL 2-HR-W-C


ELECTRIC
F. E. I.

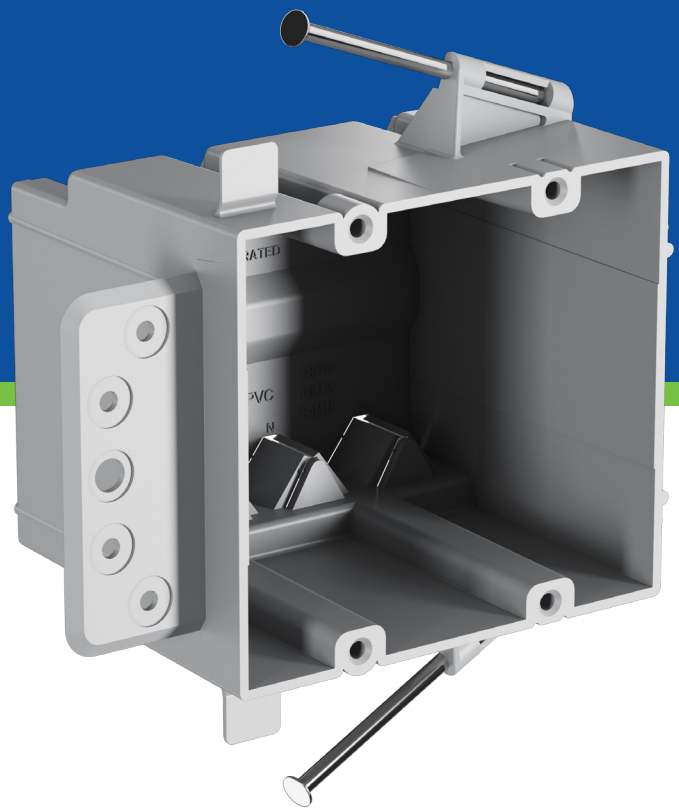

ITEM NO. LIC-2G

2-Gang Non-Metallic Outlet Box

Scan for
Specifications

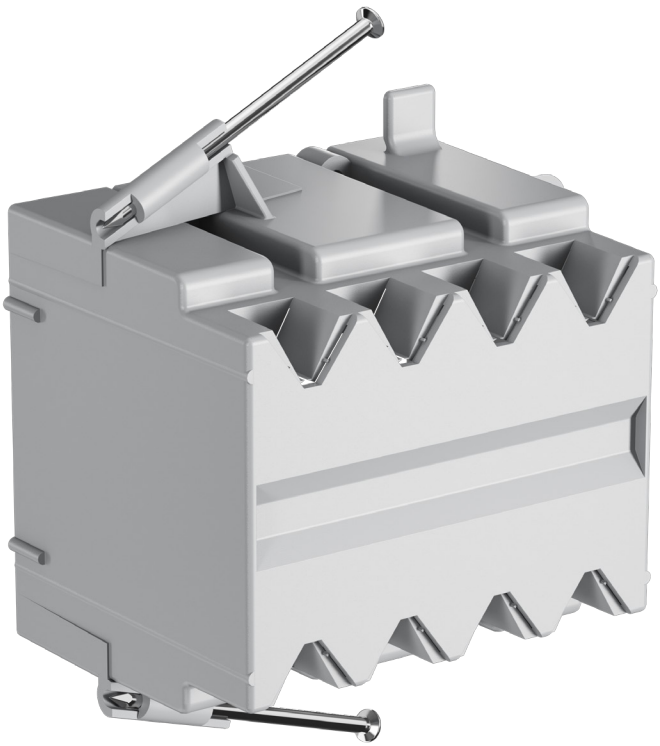

ITEM NO. LIC-2G

2-Gang Non-Metallic Outlet Box

Product Description:

2-Gang Non-Metallic Outlet Box

Application:

Mounts to wooden stud in new work residential applications.

Features:


- Nail holders allow for easy installation to wooden stud.
- Wall alignment tabs for easy placement and screw holes.
- Assisting bracket for added stability.
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.

Item No.	LIC-2G
Trade Code:	2-Gang
Volume:	36 CU. IN.
Type of Installation:	New Work
Height:	5.81 inches
Width:	5.19 inches
Depth:	3.19 inches

Certifications:

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance


ELECTRIC
F. E. I.

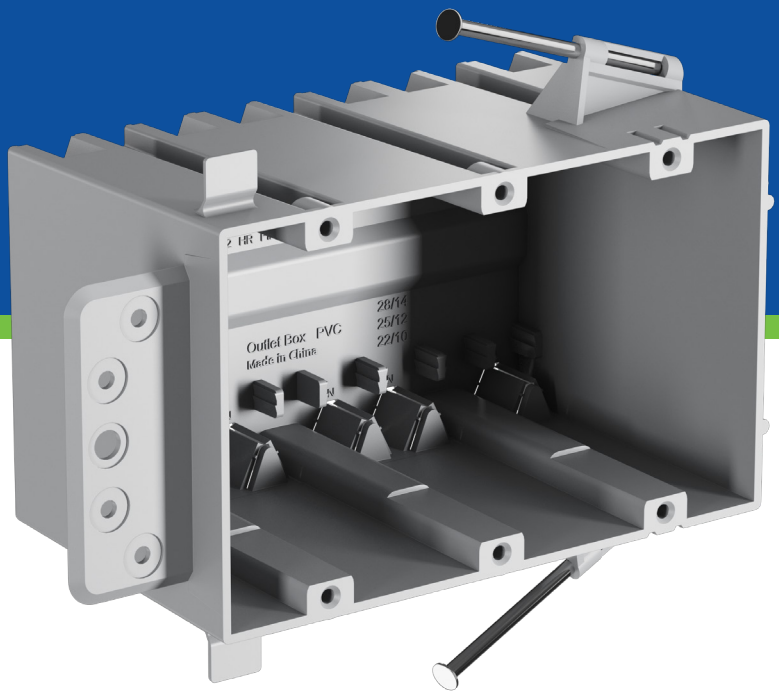

ITEM NO. LIC-3G

3-Gang Non-Metallic Outlet Box

Scan for Specifications

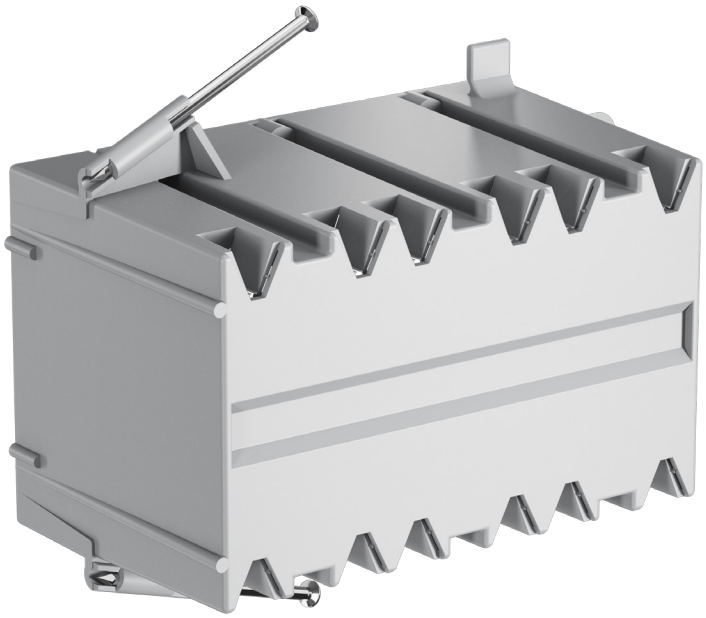

ITEM NO. LIC-3G

3-Gang Non-Metallic Outlet Box

Product Description:

3-Gang Non-Metallic Outlet Box

Application:

Mounts to wooden stud in new work residential applications.

Features:

- Nail holders allow for easy installation to wooden stud.
- Wall alignment tabs for easy placement and screw holes.
- Assisting bracket for added stability.
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.

Item No.	LIC-3G
Trade Code:	3-Gang
Volume:	57 CU. IN.
Type of Installation:	New Work
Height:	5.81 inches
Width:	7.14 inches
Depth:	3.48 inches


UL LISTED

CLASSIFIED UL 2-HR-W

Certifications:

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance


ELECTRIC
F. E. I.

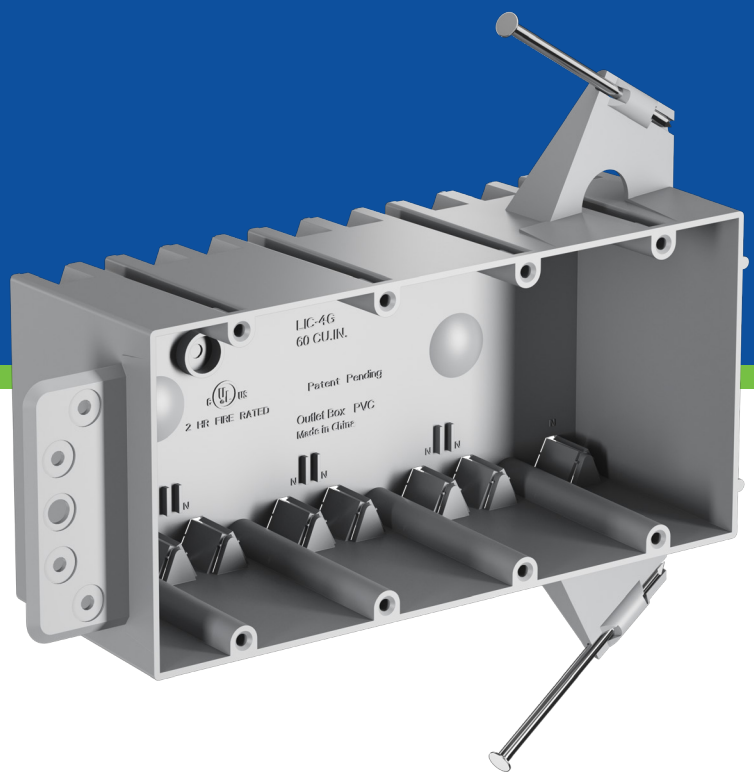

ITEM NO. LIC-4G

4-Gang Non-Metallic Outlet Box

Scan for Specifications

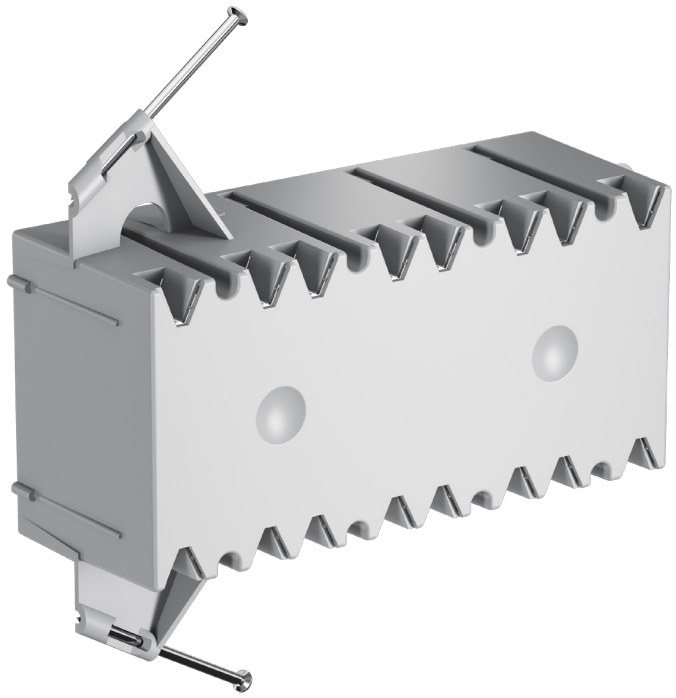

ITEM NO. LIC-4G

4-Gang Non-Metallic Outlet Box

Product Description:

4-Gang Non-Metallic Outlet Box

Application:

Mounts to wooden stud in new work residential applications.

Features:


- Nail holders allow for easy installation to wooden stud.
- Wall alignment tabs for easy placement and screw holes.
- Assisting bracket for added stability
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.

Item No.	LIC-4G
Trade Code:	4-Gang
Volume:	60 CU. IN.
Type of Installation:	New Work
Height:	7.82 inches
Width:	8.88 inches
Depth:	2.77 inches

Certifications:

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance


ELECTRIC
F. E. I.

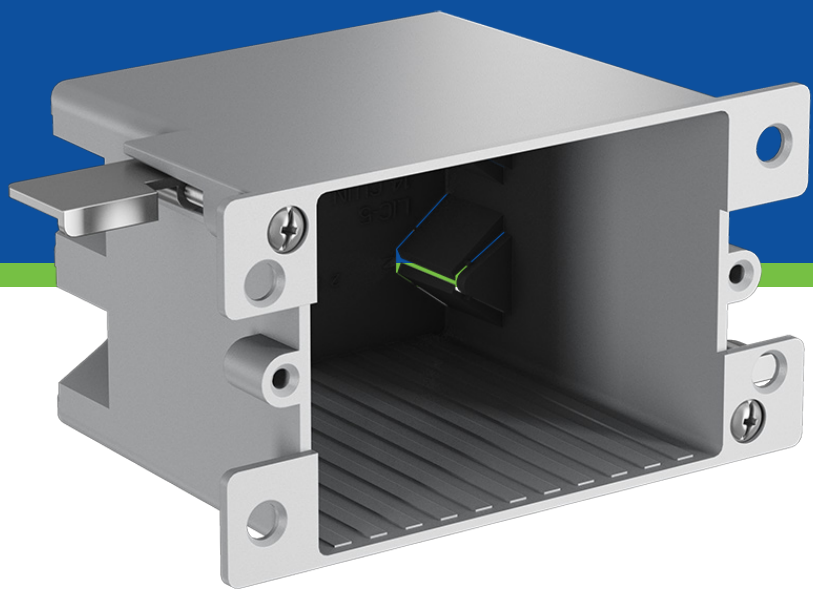

ITEM NO. LIC-5

1-Gang Non-Metallic Outlet Box Old Work

Scan for
Specifications

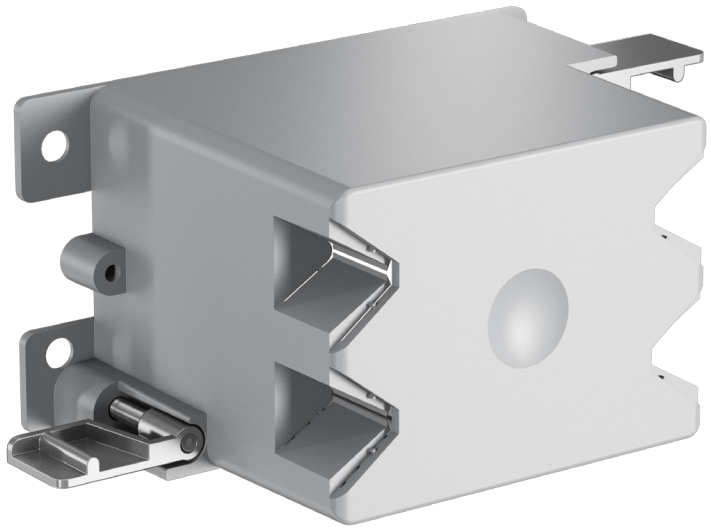

ITEM NO. LIC-5

1-Gang Non-Metallic Outlet Box Old Work

Product Description:

1-Gang Non-Metallic Outlet Box

Application:

Mounts into a pre-cut hole in old work residential applications.

Features:

- Mounting tabs for easy installation.
- “V” wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.


Item No.	LIC-5
Trade Code:	1-Gang
Volume:	14 CU. IN.
Type of Installation:	Old Work
Height:	4.15 inches
Width:	2.26 inches
Depth:	2.80 inches

Certifications:

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

UL LISTED
CLASSIFIED UL 2-HR-W-C


ELECTRIC
F. E. I.

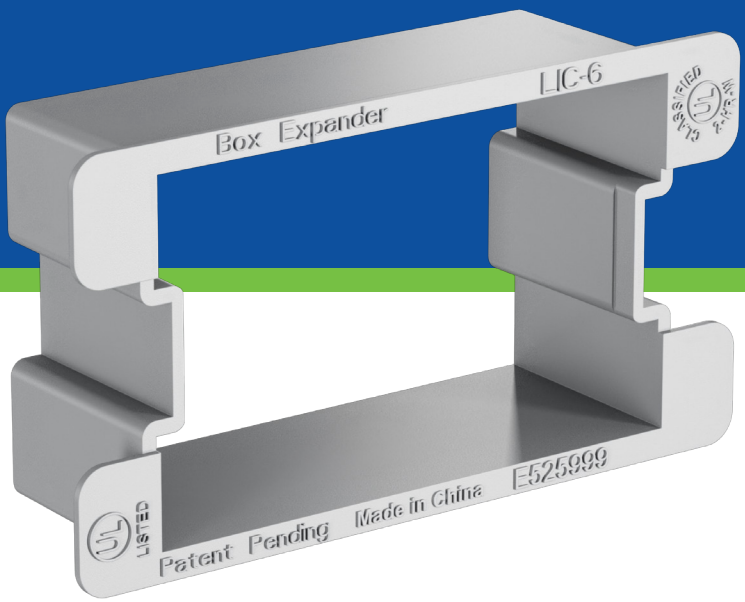

ITEM NO. LIC-6

1-Gang Non-Metallic Box Expander

Scan for
Specifications

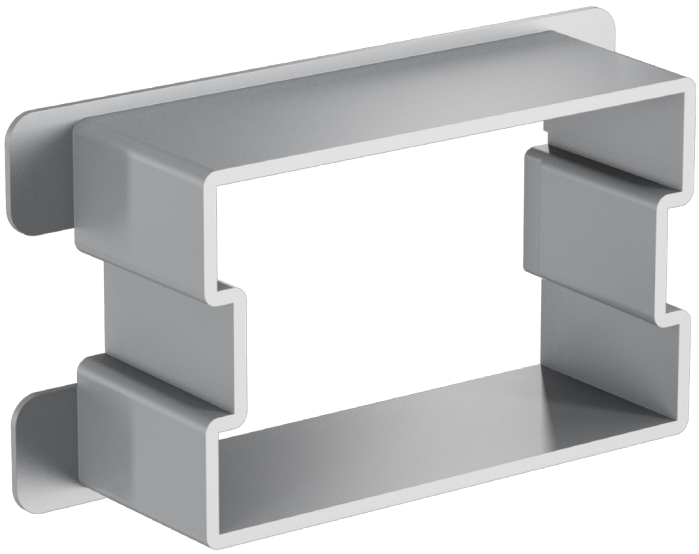

ITEM NO. LIC-6

1-Gang Non-Metallic Box Expander

Product Description:

1-Gang Non-Metallic Box Expander

Application:

Slides into 1-Gang New Work Outlet Boxes.

Features:

- Fits around Dimmers and GFCI Devices.
- Fits into 1-Gang New Work Boxes.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.

Certifications:


- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item No.	LIC-6
Trade Code:	1-Gang
Volume:	6 CU. IN.
Type of Installation:	New Work
Height:	4.0 inches
Width:	2.20 inches
Depth:	1.20 inches

UL LISTED

CLASSIFIED UL 2-HR-W

ELECTRIC
F. E. I.

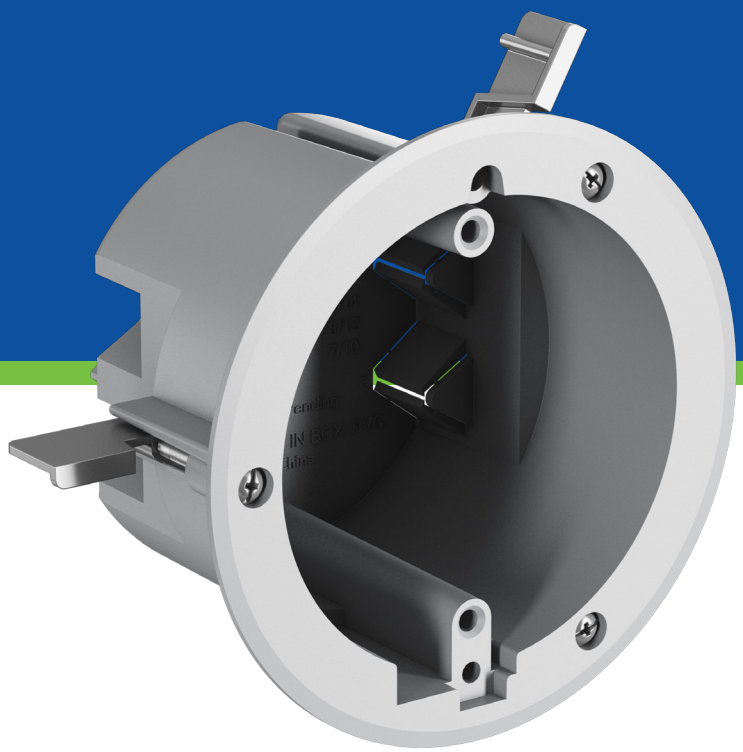

ITEM NO. LIC-7

4/0 Round Old Work Ceiling Box

Scan for
Specifications



ITEM NO. LIC-7

4/0 Round Old Work Ceiling Box

Product Description:

4/0 Round Ceiling Box Old Work

Application:

Mounts into a pre-cut hole in old work residential applications.

Features:

- Mounting tabs for easy installation.
- “V” wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.
- Rated for up to 6 lb. fixture support.

Certifications:

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item No.	LIC-7
Trade Code:	4/0 Round
Volume:	18 CU. IN.
Type of Installation:	Old Work
Height:	2.67 inches
Width:	4.39 inches
Depth:	4.39 inches

UL LISTED

CLASSIFIED UL 2-HR-F-C

ELECTRIC
F. E. I.



ITEM NO. LIC-8

4/0 Round Box (Ceiling Box) w/ 24” Max Bar

Scan for
Specifications



ITEM NO. LIC-8

4/0 Round Box (Ceiling Box) w/ 24" Max Bar

Product Description:

4/0 Round Box (Ceiling Box) with Adjustable Bar

Application:

Ceiling fixture box with adjustable bar for new work residential applications.

Features:

- Includes Adjustable Bar.
- "V" wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.
- Rated for up to 50 lb. fixture support.

Certifications:


- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item No.	LIC-8
Trade Code:	4/0 Round
Volume:	20 CU. IN.
Type of Installation:	New Work
Height:	2.30 inches
Width:	4.06 inches
Depth:	4.06 inches

UL LISTED

CLASSIFIED UL 2-HR-C

ELECTRIC
F. E. I.

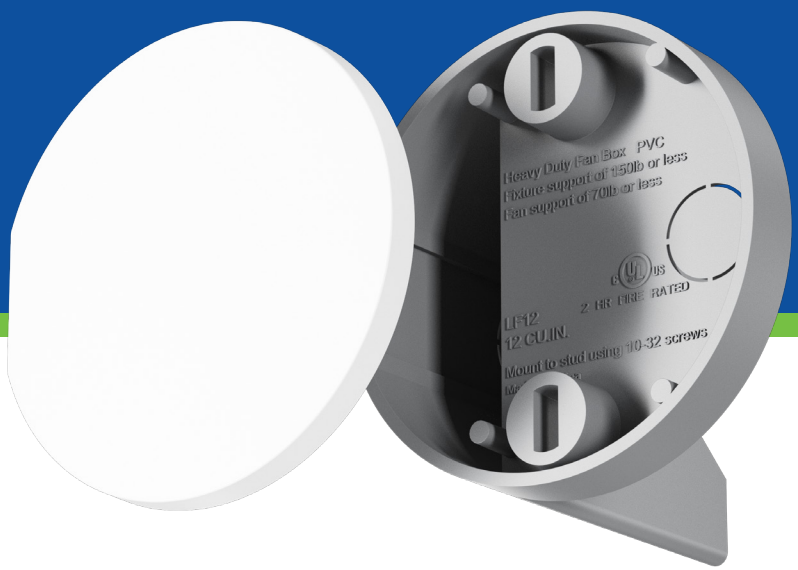

ITEM NO. LIC-9

Heavy Duty Fan Box

Scan for
Specifications



ITEM NO. LIC-9

Heavy Duty Fan Box

Product Description:

Heavy Duty Fan Support

Application:

Ceiling Fan Support Mounts to wooden stud.

Features:

- Rated for up to 150 lb. fixture support.
- Rated for up to 70 lb. ceiling fan support.
- L-shaped saddle style fan box screws straight to wooden stud using 10-32 screws.
- “V” wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PC material creates stability and rigidity.
- Wire protecting cap.
- Use provided screws only.

Item No.	LIC-9
Trade Code:	4/0 Round
Volume:	12 CU. IN.
Type of Installation:	New Work
Height:	4.06 inches
Width:	3.80 inches
Depth:	4.18 inches

UL LISTED

CLASSIFIED UL 2-HR-C

Certifications:

- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

ELECTRIC
F. E. I.



ITEM NO. LIC-10

Ceiling Fan Outlet Box

Scan for
Specifications



ITEM NO. LIC-10

Ceiling Fan Outlet Box

Product Description:

Ceiling Fan Outlet Box

Application:

Mounts to wooden stud using provided screws.

Features:

- Rated for up to 35 lb. ceiling fan support.
- Rated for up to 50 lb. fixture support.
- “V” wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.
- Use provided screws and washers only.

Certifications:


- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item No.	LIC-10
Trade Code:	4/0 Round
Volume:	8 CU. IN.
Type of Installation:	New Work
Height:	4.30 inches
Width:	4.30 inches
Depth:	1.36 inches

UL LISTED

CLASSIFIED UL 2-HR-C


ELECTRIC
F. E. I.

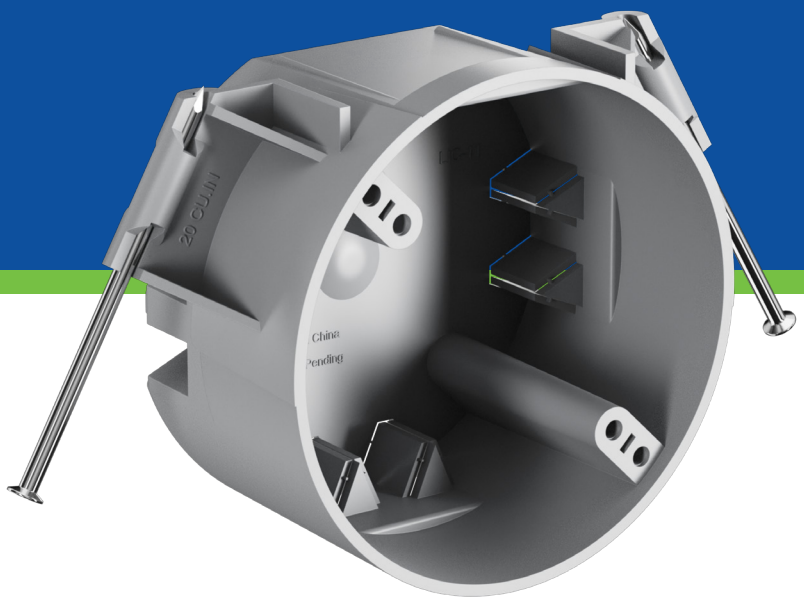

ITEM NO. LIC-11

4/0 Nail-on Fixture Box

Scan for
Specifications

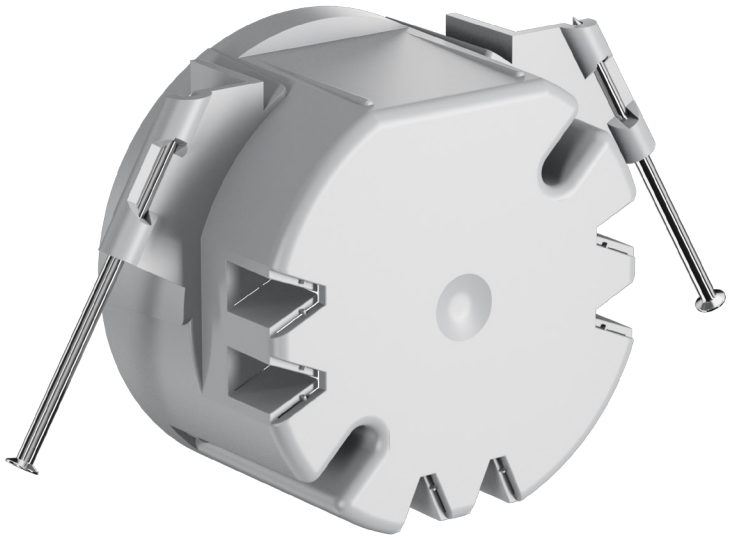

ITEM NO. LIC-11

4/0 Nail-on Fixture Box

Product Description:

4/0 Nail-on Fixture Box

Application:

Mounts to wooden stud using provided screws.

Features:

- Rated for up to 50 lb. fixture support.
- “V” wire clamps for securing the wire.
- UL Listed.
- 2 Hour Fire Rating.
- Thick PVC material creates stability and rigidity.
- Use provided screws and washers only.

Certifications:


- UL Listed to UL 514C
- UL Classified for 2 Hour Fire Resistance

Item No.	LIC-11
Trade Code:	4/0 Round
Volume:	8 CU. IN.
Type of Installation:	New Work
Height:	4.0 inches
Width:	5.53 inches
Depth:	2.32 inches

UL LISTED

CLASSIFIED UL 2-HR-W-C

ELECTRIC
F. E. I.

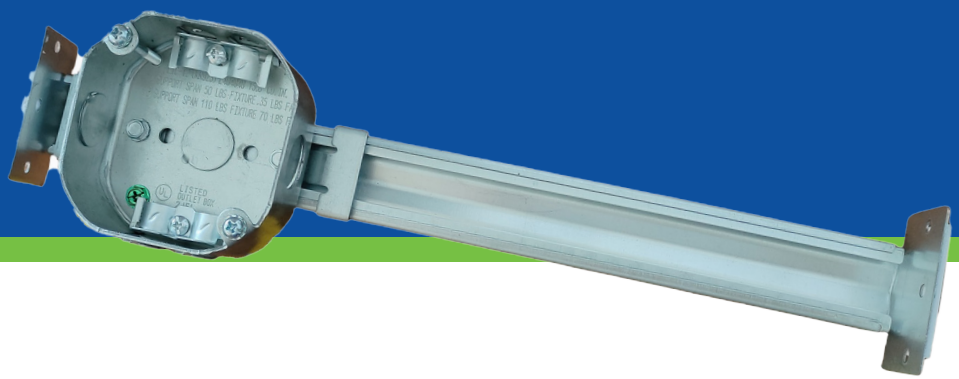

ITEM NO. LIC-12

Metal Fan Support Box

Scan for
Specifications



ITEM NO. LIC-12

Metal Fan Support Box

Product Description:

1-1/2" Octagon Ceiling Fan Box with Adjustable Bar

Application:

Ceiling fan / fixture box with adjustable bar for new work residential applications.

Features:

- Metal support bar extends from 16" to 24".
- Rated for up to 110 lb. fixture support.
- Rated for up to 70 lb. ceiling fan support.
- Fixture mounting hardware included (10-32 x 1" and 8-32 acceptable), green grounding screw included.
- Adjustable metal box slides along metal bar for precise location.
- Three 1/2" knockouts.
- UL 514A, CSA C22.2 Approval.

Item No.	LIC-12
Trade Code:	4/0 Octagon
Volume:	15.8 CU. IN.
Type of Installation:	New Work
Height:	4.25 inches
Width:	3.60 inches
Depth:	2.03 inches

UL LISTED

Certifications:

- UL Listed to UL 514A

Packaging & Shipping Information

Item #	Carton (L) in.	Carton (W) in.	Carton (H) in.	Quantity per Carton (PCS)	Quantity of Cartons per 40HQ	Quantity per 40HQ (PCS)
LIC-1G	21.25	12.99	18.50	100	760	76000
LIC-2G	24.40	21.25	16.93	100	480	48000
LIC-3G	26.57	16.14	18.70	60	465	27900
LIC-4G	27.16	17.32	14.96	40	570	22800
LIC-5	19.29	18.70	15.35	200	701	140200
LIC-6	20.47	17.72	13.98	400	805	322000
LIC-7	20.47	16.73	14.96	100	840	84000
LIC-8	22.05	14.96	12.20	60	1008	60480
LIC-9	21.65	17.72	15.35	120	670	80400
LIC-10	22.24	17.72	12.20	200	840	168000
LIC-11	23.62	18.11	15.15	90	741	66690
LIC-12	22.05	15.35	5.70	12	1930	23160

ELECTRIC
F. E. I.

Scan For Product Showcase

INFO.FEIELEC@AOL.COM
WWW.FEI-ELECTRIC.COM
1-866-FEI-ELEC (334-3532)