



Easier to Install Epoxy Grout



It is a 100% solid, two-component, non-water cleanable epoxy resin based grout. Outstanding characteristics makes it ideal for the interior and exterior applications of virtually all tile options available today in residential, commercial and industrial buildings.



- For joint width: 1/16" - 3/8".
- Waterproof, ideal for wet areas such as kitchen and bathroom.
- No extra sealing needed.
- Resistant to stain, mold, mildew, bacteria, abrasion, crack and chemical, ideal for heavy traffic areas.
- Ready-to-use formula and design.
- Easy to use and clean up. Labor-saving to finish the job.
- Special caulking gun & gadgets needed to apply.






Volume	13.5 fl oz (400ml). Part A & B each half.
Pot Life	Months (as long as two components are not mixed).
Initial Set	4 hrs able to clean-up at 77°F (25°C).
Cure Time	24 hrs at 77°F (25°C)
Shelf Life	1 Year from the manufacture date.
Storage Temp.	40-100°F (5-37°C).
Maintenance	Rarely needed.
Package	1 cartridge, 2 mix nozzles.
Standard	ISO 13007-3:2010





Joint Size (Width × Depth)	Coverage (linear length / unit)
1/16"×1/8" 1.5×3 mm	95 ft 29 m
1/8"×1/8" 3×3 mm	47 ft 14 m
3/16"×1/8" 4.5×3 mm	32 ft 9.7 m
1/4"×1/8" 6×3 mm	24 ft 7.3 m
3/8"×1/8" 9×3 mm	16 ft 4.8 m

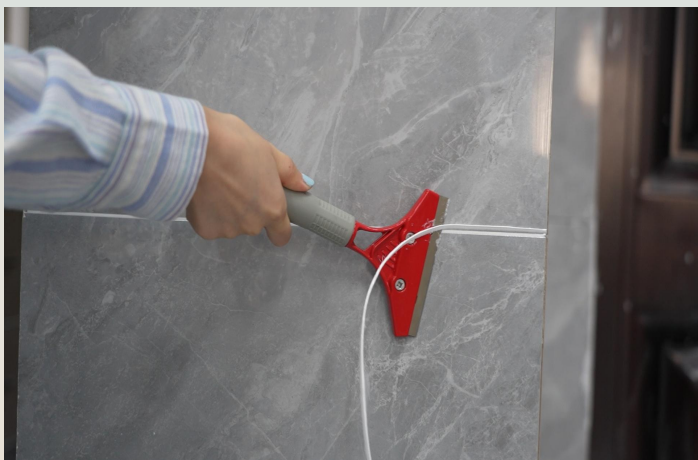

Technical Data

Test Method:
ISO 13007-3:2010 Ceramic tiles Grouts and adhesives
Part 3:Terms, definitions and specifications for grouts Second Edition.

Test Item	Test Results	Technical Requirements
Abrasion resistance	72mm ³	≤250mm ³
Shrinkage	0.8mm/m	≤1.5mm/m
Flexural strength under standard conditions	>58N/mm ²	≥30N/mm ²
Compressive strength under standard conditions	>93N/mm ²	≥45N/mm ²
Water absorption after 240min	0.05g	≤0.1g



Demo - Epoxy
Grout Installation



How It Is Produced

Demexgrout LLC
1942 Broadway St, Ste 314C
Boulder, CO 80302
Tel: 201-367-8945
info@demexgrout.com