

Related Products

Abosolv™: Solvent for LiquidWood. Use for thinning LiquidWood and cleaning up.

LiquidWood® - Cold: A variant of the original LiquidWood formula, designed for use between 35° F and 60° F. It will penetrate and harden wood, restore strength, and impart resistance to water, weather, and wear. 2:1 Mixing Ratio. Serves as a primer for WoodEpox - Cold wood replacement compound.

WoodEpox® - Cold: A variant of the original WoodEpox formula, designed for use between 35° F and 60° F. This lightweight, epoxy adhesive putty is designed to repair, replace, extend, or fill wood and most rigid surfaces. Use to patch and repair wood after treating the surface with LiquidWood Cold.

Clearstrip™: Environmentally friendly paint remover designed to remove multiple layers in one action. Will not mar normal wood patina. It is biodegradable, nonflammable and very low odor.


Sarco Dual Glaze Elastic Glazing Compound: Holds a permanent, water-tight bond on wood and metal sash and doors.

Sarco Multi-Glaze Type M Glazing Compound: The quickest surface skimming product for inside shop use.

Pigments: A variety of pigments that can be blended into WoodEpox while mixing uniformly to match wood tones. One or more can be blended to create depth of color and varying tones. Pigments include (from left to right): Goldenrod, Brick Red, Brown, White, and Black.

For a complete description of ABATRON's products and accessories related to wood restoration visit the company's website below or call for a free catalog.

Follow These Simple Instructions:

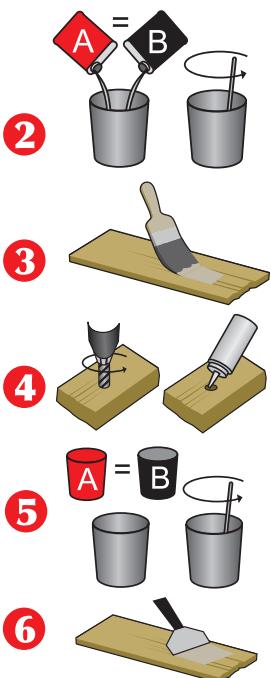

1. Apply to clean and dry surface after removing contaminants, oil, grease, wax, old paint and debris.
2. Mix a volume of LiquidWood A with an equal volume of LiquidWood B for at least one minute with blade or paddle.
3. Apply LiquidWood mix to deteriorated wood by brushing, pouring or injecting.
4. For deeper penetration into wood, drill small holes through side grain and across end grain, and pour LiquidWood into holes. Repeat process until wood is saturated.
5. Mix thoroughly a volume of WoodEpox A with an equal volume of WoodEpox B.
6. Apply WoodEpox to wood primed with LiquidWood while LiquidWood is still "tacky" to fill cracks, holes and replace missing wood.
7. Sand, plane, shape, paint and stain restored wood as desired. Wait to paint or stain until the WoodEpox is sandable, 4hrs. to 24 hrs. depending on the temperature.

Manufactured by:

U&C COATINGS
WOOD & CONCRETE...PROTECT, BEAUTIFY, RESTORE
ABATRON ANCHORSEAL COLOR PUTTY CONTECHM ecochemical SEALONICE
uccoatings.com

ABATRON
5501 95th Ave.
Kenosha, WI 53144 USA
800-445-1754
www.abatron.com
info@abatron.com



7/2024

ABATRON

MADE IN USA

Restore Rotted Wood in Three Easy Steps

1 Prepare Wood

Remove old paint, dirt, and debris. Clean oily surfaces with detergent, water, or solvents.

2 Apply LiquidWood



To strengthen the wood, apply LiquidWood with a brush, or pour directly on the surface. LiquidWood penetrates and hardens.

3 Apply WoodEpox



To rebuild missing pieces of wood and fill cracks and holes, apply WoodEpox. When hard, it can be sanded, stained, painted, and nailed.



LiquidWood® and WoodEpox®

Wood Restoration System

The Standard to Restore and Replace Wood

LiquidWood® Reinforces, rebuilds, and waterproofs wood by hardening after penetrating. Regenerates rotted windowsills, frames, structural and decorative parts, furniture, columns, boats, floors. Primer for WoodEpox.

WoodEpox® Structural adhesive putty. Most versatile, high-strength, no-shrink adhesive paste to fill, repair, and replace wood and other materials in structures, walls floors, furniture, sculptures. A standard in workshops, plants, buildings, museums, shipyards, and homes.

Specified by U.S Government agencies, architects and other professionals, LiquidWood and WoodEpox comprise the most complete and permanent Wood Restoration System available today. They give new life to rotted, severely damaged wood, and are oftentimes the only hope for wooden pieces that cannot be replaced due to size, shape, or artistic reasons. Repairs made with LiquidWood and WoodEpox are fully functional, permanent, and are often stronger and more durable than the original wood.



LiquidWood®

Deep penetrating wood consolidant that regenerates and waterproofs rotted, dried-out, or spongy wood. It restores structural strength and durability to wood fibers. With LiquidWood, a piece of deteriorated wood that could crumble under finger pressure can be impregnated and restored to a rigid, durable, water and weather resistant wood superior to the original. The hardened mass can be sawed, planed, routed, carved, drilled, nailed, sanded, glued, and painted. LiquidWood is also a primer for WoodEpox.

Uses: LiquidWood is ideal for regenerating and waterproofing rotted, dried-out or spongy window sills, thresholds, window and door frames, columns, stair steps, balustrades, floors, capitals, moldings, doors, shutters, indoor and outdoor furniture, archaeological and art restoration, boats, and millwork of all kinds.

Features & Benefits: LiquidWood has exceptional adhesion, structural strength, versatility, permanence, dimensional stability, and water resistance. LiquidWood A and B are easy to use, are 100% reactive compounds, and contain virtually no VOC's or noxious odors.

Technical Characteristics: LiquidWood consists of 2 clear, epoxy liquids: resin (A) and hardener (B). When A and B are mixed together in equal volumes, by simple stirring, a blend is formed with unique properties to impregnate and restore wood and other porous masses. Application: pour or brush on the wood where it penetrates the fibers and hardens into a water-resistant, distortion-free, high-strength mass in hours or minutes. 100% solids. 1/1 ratio. 30 minute pot life.

Both LiquidWood and WoodEpox are GREENGUARD Certified for indoor air quality.

		Kg/cm ²	Mpa	Psi
Tensile Strength		103	10.1	1460
Compressive Strength		366	36	5210
Flexural Strength		63	6.2	900
Hardness Shore D	42			
Elongation	84%			

"I purchased your wood restoration kit this summer and used LiquidWood and WoodEpox in order to repair damaged windowsills that I thought were beyond repair. I had rotted, wet, spongy windows in multiple spots throughout my home. I was absolutely amazed at how well your wood restoration kit worked, and I'm especially astonished by the properties of WoodEpox."

P.S., Homeowner
Fayetteville, North Carolina



WoodEpox®

Shrink-free adhesive putty **wood replacement compound** that can be used in any thickness in structural and decorative applications to replace, repair, extend, or fill wood and other materials.

Uses: WoodEpox is ideal for repairing, replacing, or adding to wood and most rigid surfaces, as well as to dried out, rotted or spongy wood consolidated with LiquidWood. Use on windowsills, thresholds, window and door frames, columns, stair steps, balustrades, floors, capitals, moldings, doors, shutters, indoor and outdoor furniture, statues, archaeological and art restoration.

Features & Benefits: WoodEpox bonds permanently with high strength to most surfaces. It fills cracks, holes, and voids of any size without the shrinking and crumbling of common wood fillers. It can replace or add missing or new sections in window frames and sills, furniture, sculptures, structural and decorative components, indoors and outdoors. Because of its strength and durability, it is a truly permanent solution where alternatives will fail.

WoodEpox succeeds because it can be painted, stained, wood-grained, sawed, nailed, planed, sanded, carved, and machined like wood. It can be cast into shapes and sculpted by hand before hardening and also carved after hardening. It bonds equally well to ceramics, concrete, metal, glass, fiberglass, and most rigid surfaces and contains virtually no VOC's or noxious odors. It has a light, neutral color that can be changed, while mixing, with pigments. Its no-slump paste consistency allows it to be applied like a putty to fill gaps, holes, or to build-up virtually any thickness and shape.

Technical Characteristics: WoodEpox is a light-weight epoxy adhesive system consisting of 2 components: resin paste (A) and hardener paste (B). When A and B are mixed in equal volumes, the blend hardens within 1-2 hours into a light-weight, non-shrinking, tough adhesive mass with high dimensional stability, chemical, water, heat and weather resistance. 100% solids. 1/1 ratio. 20 minute pot life.

		Kg/cm ²	Mpa	Psi
Tensile Strength		176	17.5	2500
Compressive Strength		389.8	37.92	2300-2800
Hardness Shore D	53-55			
Elongation	4%			



**LiquidWood and
WoodEpox are
ideal for log home
repair and restoration**

