

AUPU
Design for Love

VENTILATION FANS PRODUCT CATALOG



BATH FAN SERIES OF 6" DEPTH

Excellent Performance with Compact Body, Ideal Retrofit Fan

Housing Size-10 1/4"*10 1/4"*5 1/8",Grill Size-13"*13",Duct Adaptor-4" round



BF6-S13C

VENTILATION RATE: 110-80-50 CFM
VOLTAGE INPUT: 120V 60Hz
RATED POWER: 16W(VENTILATION)
HUMIDITY SENSING: 30%-80% RH



BF6-S13CL

VENTILATION RATE: 110-80-50 CFM
VOLTAGE INPUT: 120V 60Hz
MOTOR TYPE: DC
RATED POWER: 16W(VENTILATION)
15W(LIGHTING)
HUMIDITY SENSING: 30%-80%RH
LED LIGHTING: 3 CCT
NIGHT LIGHT




BF6-S13LRS

Air Flow: 130-100-70 CFM, Selectable
Noise Level: 0.8 Sones@130 CFM,
0.5 Sones@100 CFM,
0.3 Sones@70 CFM
Motor Type: DC
Humidity Sensor with Delay Timer
RGB: Multiple Color Modes, Music Sync
Speaker: Bluetooth Connection
LED lighting: 3 CCT & 3 Brightness Level
Night Light
Control Mode: Remote Controller



Quick Installation Bracket, Flexible Length,
No Need of Attic Access

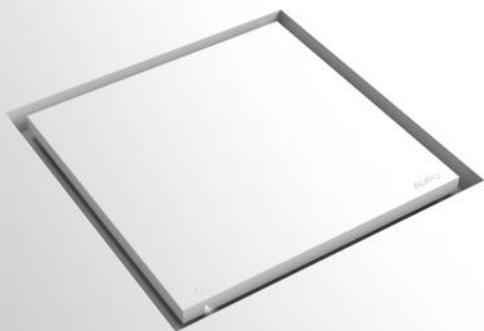

ConcealSquare Ventilator

VENTILATION RATE: 110-80-50 CFM
VOLTAGE INPUT: 120V 60Hz
RATED POWER: 16W(VENTILATION)
HUMIDITY SENSING: 30%-80% RH



ConcealRound Ventilator

VENTILATION RATE: 110-80-50 CFM
VOLTAGE INPUT: 120V 60Hz
RATED POWER: 16W(VENTILATION)
HUMIDITY SENSING: 30%-80% RH



ConcealLinear Ventilator

VENTILATION RATE: 110-80-50 CFM
VOLTAGE INPUT: 120V 60Hz
RATED POWER: 16W(VENTILATION)
HUMIDITY SENSING: 30%-80% RH

BATH FAN SERIES OF 4" DEPTH

Solid Choice,Rich Configuration

Housing Size-10 1/4"*10 1/4"*3 1/2",Grill Size-13"*13",OVAL OUTLET DESIGN



ABFS0511D6W

Air Flow(CFM): 110 CFM
Noise(sones): 0.9-1.1
Wattage(W): 24.5-25.2
Features: AC Motor, Outlet Adaptor,
Quick Mounting Bracket



ABFS0511DL6W

Air Flow(CFM): 110-80-50 CFM
Noise(sones): 1.4-1.5/0.4-0.7/<0.3
VOLTAGE INPUT: 120V 60HZ
Wattage(W): Exhaust:12.7-14.2/6.7-7.4/4.4-4.6;
Lighting: 10
N. Light:0.7
Features: DC Motor,Lighting, Adjustable CFM,
Quick Mounting Bracket

BATH FAN SERIES OF 8" DEPTH

Solid Choice,Rich Configuration

Housing Size-10 5/12"*10 3/8"*7 1/2",Grill Size-13"*13",Duct Adaptor-4" & 5" & 6" round



ABF110G

Air Flow(CFM): 110 CFM
Noise(sones): 0.9-1.1
Wattage(W): 24.5-25.2
Features: AC Motor, Outlet Adaptor,
Quick Mounting Bracket



ABF110L

Air Flow(CFM): 110 CFM
Noise(sones): 0.7-0.9
Wattage(W): Exhaust:24.8-25.6;
Lighting: 10
N. Light:0.7
Features: AC Motor, Lighting, Outlet Adaptor,
Quick Mounting Bracket



FAN WITH HEATER

Multiple Product Options, Temperature at Your Fingertips.




Cool-Warm Bath Heater

Housing: 670*330**220
 Air Flow(CFM): 300 CFM
 Max Noise(db): 64 db
 Motor: DC, 2 Speed, Plastic Sealed Motor
 Wattage(W): Heating:3000W Cold:1450W
 Features: NBSS+2.0, AI Heating, Dry, Ventilation, Fan, Lighting, Nightlight, Standby, cold

Ultimate Bath Heater

Housing: 460*330*210
 Air Flow(CFM): 220 CFM
 Max Noise(db): 50 db
 Motor: AC
 Wattage(W): 1600W
 Features: Ventilation, Heating

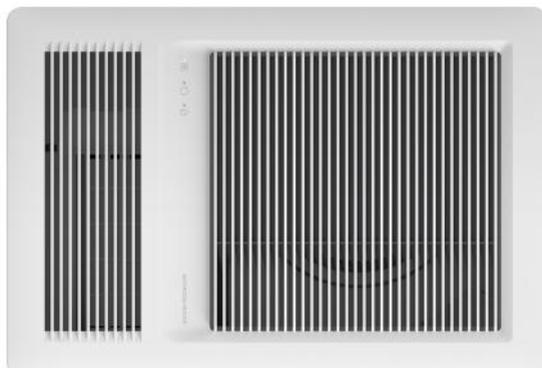



CKZ-26Q-A-GT

GRILLE:619*103; HOUSING:880*617*225



Cooling Capacity(Btu): 7000 (T1)

Loading Capacity: 35 kg

Wattage(W): Cooling Power: 1300W \ Heating power: 1050W

Functions: Cooling, Fan, Standby, Dehumid, Temp±(16-30°C),
DIR, 3 Speed, Fast-Cool, Ex-Lighting, Timer

DEHUMIDIFIER

GRILLE:619*103; HOUSING:880*617*225



Gear	Dehumidification Capacity	Power	Energy Efficiency	Noise Level
High	6.24	134.9	1.92	41.6
Medium	5.40	107	2.10	39.2
Low	3.96	91.2	1.81	37.4



L358

DIMENSION: 1170*450*208 mm TELESCOPIC ROD: 1170-2040 mm



Drop Height: 1100 mm

Loading Capacity: 35 kg

Wattage(W): Drying Power :1048W \ Lighting:18W

Functions: NBSS+Dry, Mass Dry, NBSS+, Lighting, Obstacle Protection, UP, Down, Lift to Rise

1200-24A

DIMENSION: 1200*100*192.7mm



Drop Height: 1200mm

Loading Capacity: 20kg

Wattage(W): Drying Power :1400W \ Lighting:80W

Functions: Lighting, Ventilation, Natural Wind, Low/high Wind Heating, Air Drying, UP, Down, Pause, Smart Drying



F3-Pro

GRILLE: 1282*22mm; HOUSING:435*347*140mm



Air Flow(CFM): 230 CFM Max Noise(db): 50.44 db

Motor: DC,5 Speed, Plastic Sealed Motor

Wattage(W): Double PTC:3200 Left PTC:2800 Right PTC:1800 Ventilation/Fan:40

Functions: NBSS+2.0, AI Heating(One side or both sides), Fan, Ventilation, Dry, Ex-Lighting, Standby

MC01-Air

GRILLE: 600*300*130.5mm



Air Flow(CFM): 180 CFM

Max Noise(db): 51.1 db

Motor: DC,5 Speed, Plastic Sealed Motor

Wattage(W): Heating:2730W

Lighting:24W

Ventilation/Fan:45W

Features: Music, RGB, Volume±, AI Heating, Deodor, Dry, Ventilation, Fan, Lighting, Nightlight, Standby

AUPU Airwhale 2 In 1 Air Purifier And Humidifier



AP-C1

Rated Power: 48W

Rated Humidification Capacity: 1100ml/h

CADR (Clean Air Delivery Rate for Particulate Matter): 50 db

Noise(db):

Sleep Mode Noise(Sound Pressure Level) \leq 19.5dB

Noise (Sound Pressure Level) \leq 51.8dB

Super Silent

Peaceful and
undisturbed Sleep

**Water self
purification¹⁸**

No need to add
purified water

AUPU

Design for Love

Export@apu.net

AUPU Intelligent Technology Corporation Limited

Address: 160 E Tasman Dr, San Jose, CA 95134

Actual colors may vary slightly from those shown.

Design and specifications subject to change without notice.

CATALOG NO: US-001, 2026 JAN