



PARFIX™

Cyanoacrylate Adhesives

General Purpose Cyanoacrylate Adhesive

Item	Viscosity
------	-----------

Product	Item No.	Packaging	Application	Color	Gap Fill	Category	Viscosity, cps	Cure Speed
3401	34011	1 oz	General Purpose	Clear	.005"	Surface Insensitive Ethyl	110	Fixture - 12 sec. Full - 24 hours
	34012	2 oz						
	34018	8 oz						
	34016	1 lb						
	34017	4.4 lbs						
	34010	44 lbs						
3406	34061	1 oz	Wicking Grade	Clear	.003"	Surface Insensitive Ethyl	20	Fixture - 12 sec. Full - 24 hours
	34062	2 oz						
	34068	8 oz						
	34066	1 lb						
	34067	4.4 lbs						
	34060	44 lbs						
3417	34171	1 oz	General Purpose Bonding	Clear	.002"	Ethyl Cyanoacrylate	3	Fixture - 20 sec. Full - 24 hours
	34172	2 oz						
	34176	1 lb						
	34170	4.4 lbs						
		44 lbs						
3431	34311	1 oz	General Purpose	Clear	.005"	Modified Ethyl	1000	Fixture - 14 sec. Full - 24 hours
	34312	2 oz						
	34316	1 lbs						
3454	34543	3 gm	Wide Variety of Surfaces	Clear	.100"	Surface Insensitive Ethyl	Gel	Fixture - 15 sec. Full - 24 hours
	34541	20 gm						
	34546	300 gm						
	34540	4.4 lbs						
		44 lbs						
3495	34951	1 oz	General Purpose Industrial	Clear	.004"	Ethyl Cyanoacrylate	45	Fixture - 20 sec. Full - 24 hours
	34952	2 oz						
	34956	1 lbs						
	34950	4.4 lbs						
		44 lbs						

Product	Item No.	Packaging	Application	Color	Gap Fill	Category	Viscosity, cps	Cure Speed
3403	34031	1 oz	Critical, Cosmetic Parts	Clear	.008"	Alkoxy-Ethyl	1,000	Fixture - 40 sec. Full - 24 hours
	34032	2 oz						
	34038	8 oz						
	34036	1 lb						
	34037	4.4 lbs						
	34030	44 lbs						
3408	34081	1 oz	Wicking Grade	Clear	.002"	Alkoxy-Ethyl	5	Fixture - 40 sec. Full - 24 hours
	34082	2 oz						
	34088	8 oz						
	34086	1 lb						
	34087	4.4 lbs						
	34080	44 lbs						
3460	34601	1 oz	Low Odor/Low Bloom	Clear	.004"	Alkoxy-Ethyl Cyanoacrylate	45	Fixture - 50 sec. Full - 24 hours
	34606	1 lb						
	34600	44 lb						

Plastic and Rubber Bonding

Product	Item No.	Packaging	Application	Color	Gap Fill	Category	Viscosity, cps	Cure Speed
3404	34041	1 oz	Rubber and Plastic Parts	Clear	.005"	Modified Ethyl	80	Fixture - 30 sec. Full - 24 hours
	34042	2 oz						
	34048	8 oz						
	34046	1 lb						
	34047	4.4 lbs						
	34040	44 lbs						
3414	34141	1 oz	Plastic Parts	Clear	.006"	Modified Ethyl	90	Fixture - 20 sec. Full - 24 hours
	34142	2 oz						
	34148	8 oz						
	34146	1 lb						
	34147	4.4 lbs						
	34140	44 lbs						
3416	34161	1 oz	Plastic Parts	Clear	.008"	Modified Ethyl	1,500	Fixture - 30 sec. Full - 24 hours
	34162	2 oz						
	34166	8 oz						
	34167	1 lb						
	34167	4.4 lbs						
	34160	44 lbs						
3420	34201	1 oz	Plastic Parts	Clear	.002"	Ethyl Cyanoacrylate	2	Fixture - 20 sec. Full - 24 hours
	34202	2 oz						
	34206	8 oz						
	34206	1 lb						
	34200	4.4 lbs						
	34200	44 lbs						
3422	34221	1 oz	Plastic Parts	Clear	.008"	Ethyl Cyanoacrylate	2,500	Fixture - 20 sec. Full - 24 hours
	34222	2 oz						
	34228	8 oz						
	34226	1 lb						
	34227	4.4 lbs						
	34220	44 lbs						

Metal Bonding

Product	Item No.	Packaging	Application	Color	Gap Fill	Category	Viscosity, cps	Cure Speed
3415	34151 34156 34150	1 oz 2 oz 1 lb 44 lbs	Metal Parts	Clear	.008"	Methyl Cyanoacrylate	1,500	Fixture - 28 sec. Full - 24 hours
3430	34301 34302 34306 34300	1 oz 2 oz 1 lb 44 lbs	Metal Parts	Clear	.005"	Methyl Cyanoacrylate	80	Fixture - 28 sec. Full - 24 hours
3493	34931 34936 34930	1 oz 2 oz 1lb 44 lbs	Low Viscosity Metal Bonder	Clear	.002"	Methyl Cyanoacrylate	2	Fixture - 20 sec. Full - 24 hours
3496	34961 34966 34960	1 oz 2 oz 1 lb 44 lbs	Rubber and Metal Parts	Clear	.006"	Methyl Cyanoacrylate	125	Fixture - 25 sec. Full - 24 hours

Medical Grade

Product	Item No.	Packaging	Application	Color	Gap Fill	Category	Viscosity, cps	Cure Speed
3412	34121 34122 34126 34120	1 oz 2 oz 1 lb 44 lbs	General Purpose Bonding	Clear	.002"	General Purpose Ethyl	3	Fixture - 12 sec. Full - 24 hours
3471	34711 34716 34717 34710	1 oz 1 lb 4.4 lbs 44 lb	Variety of Surfaces	Clear	.007"	Surface Insensitive Ethyl	600	Fixture - 10 sec. Full - 24 hours

Rubber Toughened

Product	Item No.	Packaging	Application	Color	Gap Fill	Category	Viscosity, cps	Cure Speed
3380	33801 33802 33806 33800	1 oz 2 oz 8 oz 1 lb 4.4 lbs 44 lbs	Industrial Parts	Black	.005"	Toughened Ethyl	450	Fixture - 60 sec. Full - 24 hours
3410	34101 34102 34106 34107	1 oz 2 oz 8 oz 1 lb 4.4 lb 44 lb	Industrial Parts Manufacturing	Black	.008"	Rubber Toughened Ethyl	3,500	Fixture - 85 sec. Full - 24 hours
3411	34111 34112 34118 34116 34117 34110	1 oz 2 oz 8 oz 1 lb 4.4 lbs 44 lbs	High Impact and Shock Resistance	Clear	.009"	Rubber Toughened Ethyl	5,000	Fixture - 28 sec. Full - 24 hours
3480	34801 34802 34806 34807 34800	1 oz 2 oz 8 oz 1 lb 4.4 lb 44 lbs	Industrial Parts Manufacturing	Black	.006"	Toughened Ethyl	300	Fixture - 80 sec. Full - 24 hours

Electronic and Speaker

Product	Item No.	Packaging	Application	Color	Gap Fill	Category	Viscosity, cps	Cure Speed
3498	34981 34986 34987	1 oz 1 lb 4.4 lbs	High Temperature Resistance	Clear	.007"	Modified Ethyl	500	Fixture - 45 sec. Full - 24 hours
3203	32021 32026 32037	1 oz 1 lb 4.4 lbs	High Temperature Resistance	Clear	.005"	Modified Ethyl	375	Fixture - 30 sec. Full - 24 hours
3212	32121 32126	20 gm 300 gm	High Temperature Resistance	Black	.008"	Rubber Toughened Ethyl	11,000	Fixture - 345 sec. Full - 24 hours

Thermal Resistance

Product	Item No.	Packaging	Application	Color	Gap Fill	Category	Viscosity, cps	Cure Speed
3498	34981 34986 34987	1 oz 1 lb 4.4 lbs	High Temperature Resistance	Clear	.007"	Modified Ethyl	500	Fixture - 45 sec. Full - 24 hours
3203	32021 32026 32037	1 oz 1 lb 4.4 lbs	High Temperature Resistance	Clear	.005"	Modified Ethyl	350	Fixture - 30 sec. Full - 24 hours
3204	32041 32046 32047	1 oz 1 lb 4.4 lbs	High Temperature Resistance	Clear	.008"	Modified Ethyl	4,050	Fixture - 30 sec. Full - 24 hours
3210	32101 32106 32107	1 oz 1 lb 4.4 lbs	High Temperature Resistance	Black	.005"	Rubber Toughened Ethyl	200	Fixture - 100 sec. Full - 24 hours
3211	32111 32116 32117	1 oz 1 lb 4.4 lbs	High Temperature Resistance	Black	.007"	Rubber Toughened Ethyl	2,500	Fixture - 200 sec. Full - 24 hours

Surface Primers, Activators, and Debonders

Product	Item No.	Packaging	Application	Color	On Part Life	Viscosity, cps	Dry Time
3712	10252 10254 10259 10250	2 oz 4 oz 1 gal 55 gal	All Cyanoacrylate Adhesives	Clear/Amber	60 sec.	2	< 30 sec.
1155	11552 11554 11557 11551 11555 11553 11550	2 oz 4 oz 10 oz Aerosol 16 oz 1 gal 5 gal 55 gal	All Cyanoacrylate Adhesives	Clear/Amber	60 sec.	0.5	< 30 sec.
3793	37932 37934 37939	2 oz 4 oz 1 gal	Primer for Cyanoacrylate Adhesives	Light Amber	< 2 hrs.	3	< 10 min.
3109	31092 31094 31099	2 oz 4 oz 1 gal	All Cyanoacrylate Adhesives	Clear/Amber	60 sec.	3	< 5 sec.
1144	11442 11446 11441 11445	2 oz 6 oz Aerosol 1 gal 5 gal	All Cyanoacrylate Adhesives	Amber	7 days	2	30 - 70 sec.
1122	11221 11222 11229	1 oz 2 oz 1 gal	De-Bonder for Cyanoacrylate Adhesives	Clear/Amber	—	1	< 30 sec.
3770	37702 37704	2 oz 4 oz	Primer for Cyanoacrylate Adhesives	Clear/Amber	2 hrs.	1	< 30 sec.




Parson Adhesives supplies adhesives to a wide variety of industries including automotive, aerospace, railway, marine, electronics, sporting goods, oil and gas, sign and display, medical device, printing and graphics, furniture, construction, transmission and engine products, and general assembly. PARSON has more than 3,500 customers in 56 different countries around the world.

- ISO 9001: 2015 certified
- DVGW certified
- BRE certified
- ROHS compliant
- SGS certified
- UL approved
- USP Class VI certified



Automotive

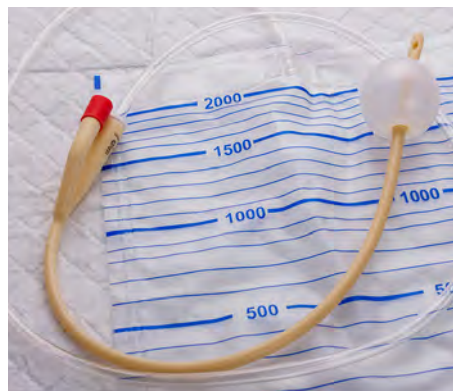

Medical



Kitchen Trim



PARSON ADHESIVES, INC.

Phone: (248) 299 5585 Email: sales@parsonadhesives.com

Website: www.parsonadhesives.com

Sales Office: 3345 W Auburn Road, Suite 107, Rochester Hills, MI 48309, USA

Manufacturing Plant: 2545 Eastside Park Road, Evansville, IN 47715, USA

