



Natural Advantage.

Haas Door Residential and Commercial Insulated Aluminum 5000 Series uses the natural advantages of aluminum and takes it to the next level. The 5000 Series has insulated garage doors with corrosion-resistant aluminum that stands up in harsh weather conditions and is a lightweight material.

These unique features provide solutions where other materials can't, but the advantages don't stop there. The 5000 Series feature tough, durable, and weather-resistant paint finish. The Series has three categories, the 5800 3" thick, 5200 2" thick, and 5700 1¾" thick garage doors, which provide thermal performance ranging from Tested U-Factor of 0.089-0.110.

The 5000 Series provides many natural advantages to meet the unique needs of your projects. Open the door to endless possibilities.



open the door to
endless possibilities



U-Factor uses a solid door assembly. Adding lites will affect the tested U-Factor.

5000 SERIES

- 3", 2", or 1¾" thick with Full Thermal Break
- 5800 Tested U-Factor - 0.089; 5200 Tested U-Factor - 0.110; 5700 Tested U-Factor - 0.097
- 24 GA Stucco Embossed Corrosion-Resistant Aluminum
- Air Infiltration Joint Seal - 5800 & 5200 models 0.25 CFM/Sq-Ft with Door Stop
- Decorative Glass & Specialty Glass - 5200 & 5700
- Polar White, Sandstone & Carbon Black




SERIES

5800 Series




- Full thermal break
- 0.089 Tested U-Factor
- Air infiltration exceeds ASHRAE 90.1 0.25 CFM/Sq-Ft
- SelectView using TL lites only
- Wind Load and Impact options available

5200 Series

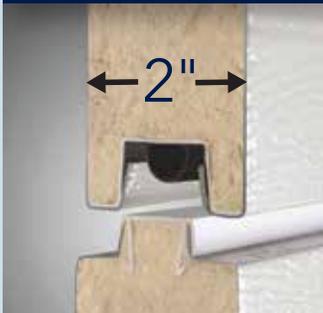

- Full thermal break
- 0.110 Tested U-Factor
- Air infiltration exceeds ASHRAE 90.1 0.25 CFM/Sq-Ft
- Vinyl and Steel end stiles available
- SelectView available up to 18'2" wide x 10' tall
- Wind Load and Impact options available, including Miami-Dade and HVHZ

5700 Series

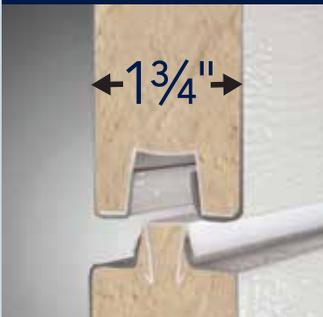


- Full thermal break
- 0.097 Tested U-Factor
- Vinyl and Steel end stiles available
- SelectView available up to 18'2" wide x 10' tall
- Wind Load and Impact options available, including Miami-Dade and HVHZ

OPTIONS

- 2" or 3" track
- Double Steel End Stiles
- Exhaust Port
- Cam Safety Device
- Spring Bumpers
- Chain Hoist
- Operators
- High Cycle Springs
- High Cycle Rollers
- Top Header Seal
- Aluminum Full View Sections (5200 & 5700)
- Keyed Lock (5200 & 5700)
- *ASTM E 84 Fire Rated
**(No Air Filtration Seal on Fire Rated Doors.)*

MODELS

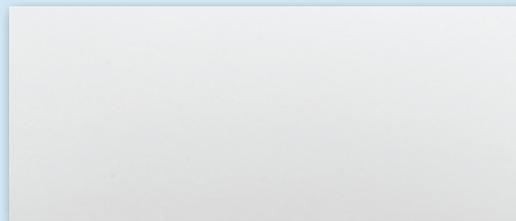

Flush Stucco

- Model 5814 - TL Lite Options
- Model 5210 - SlimLine, Standard, Carriage House, Ranch & TL Lite Options
- Model 5214 - TL Lite Options
- Model 5710 - SlimLine, Standard, Carriage House, Ranch & TL Lite Options
- Model 5714 - TL Lite Options



V-Groove Stucco

- Model 5816 - TL Lite Options
- Model 5212 - SlimLine & TL Lite Options
- Model 5216 - TL Lite Options
- Model 5712 - SlimLine & TL Lite Options
- Model 5716 - TL Lite Options



Ranch Stucco Panel

- Model 5870 - No Window Options
- Model 5270 - Ranch Window Options
- Model 5770 - Ranch Window Options



Raised Standard Stucco Panel

- Model 5880 - No Window Options
- Model 5280 - Standard Window Options
- Model 5780 - Standard Window Options

COLORS



Polar White Sandstone Carbon Black

Due to the printing process, colors may vary. For accurate color match, contact your Haas Door dealer.