



Ventgrid¹², is the ideal solution for building assemblies where a drainage / ventilation air space is needed. Unlike ordinary methods such as wood furring, Ventgrid¹² is made from almost 100% “post consumer” recycled plastic so it is highly resistant to deterioration and degradation. Ventgrid¹² will not decay, rot, absorb moisture or support mold growth.


Fast & Easy Installation

- Covers 32 ft² per sheet - greater coverage in less time
- Lightweight for easy handling
- Fewer fasteners required - save time and labour
- Laminate floors can be installed directly on Ventgrid
- Easy to cut - just score & snap, no power tools
- Open grid - easier to find the stud
- Simple to shim - ideal for renovations
- Pre-formed fastener holes for fast & easy installation

Performance & Value

- Cannot crush - consistent nail penetration
- Non organic - Rot and mold resistant
- Protects building paper - reduces wind damage
- Full surface support - reduces siding damage
- Made with recycled HDPE plastic


SPECIFICATIONS	
Sheet Length	8 ft (2.44m)
Sheet Width	4 ft (1.22m)
Total Thickness	1/2 in (12.7mm)
Weight / Sheet	8 lbs (3.6kg)
Standoff Spacing	2 in (50.8mm)
Grid Bar Size	Ø1/4 in (Ø3.4mm)
Material Type	HDPE
Recyclable	Yes
Cutting Method	Score & Snap
Fastening Req'd	Minimal
Compressive Strength	Tested to over 8,000 lb/sqft

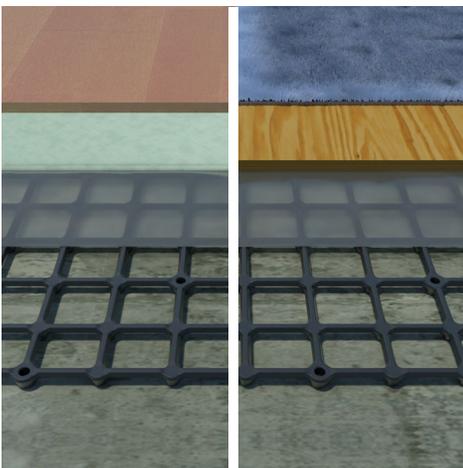

SUBFLOOR



VENTILATED RAINSCREEN

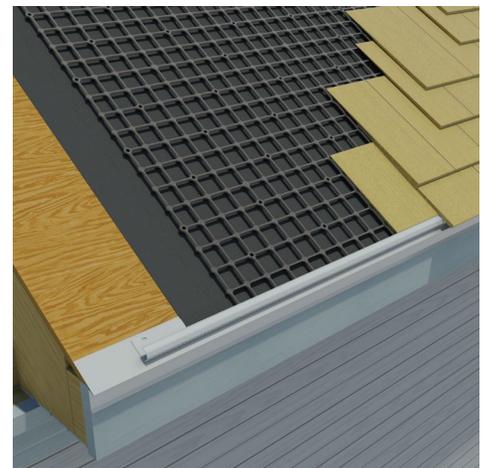

ROOFING

Follow us:



© ventgrid inc., 2022

www.ventgrid.com

54 Heron Point Road, Mahone Bay, NS B0J 2E0 Canada
E-mail: info@ventgrid.com
Phone: 1-902-273-3051