Tel: 0086-21-58223048
Fax:0086-21-58220631

SHANGHAI SUPERHOUSE BLDG MATL CO.LTD
Office Add:
Level 5, Building 10,
No.8666 Hunan Road,
Pudong New Area, Shanghai, P.R. China

Superhouse (Jiangsu) Window System LLC
Factory Add:
No. 12 Haihong Road,
Qidong Binhai Industry Zone,
Nantong City, Jiangsu Province P.R.China

isuperhouse.com
info@isuperhouse.com

SuperHouse
-for a super life

MIAMI-DADE COUNTY · Certified Product Australian Standard · AWA AUSTRALIAN WINDOW ASSOCIATION · WINDOW ENERGY RATING · CSA · NFRC National Fenestration Rating Council CERTIFIED · 10 YEAR WARRANTY

INTRODUCTION

Superhouse is for a super life
Our continuous research and development leads to offer unique solutions like bullet proof and hurricane proof and thermal insulation and so on with many innovative features, which totally meet the needs of our customers. So you aren't just installing windows and doors. You're installing excellence.

With 15 years of experience, Superhouse is one of the most advanced companies in China and in the design & window products by meet AS2047 Standard, NFRC, NOA

Main Market
🟩 America
🟧 Canada
🟪 Australia

- ☑ Meet Australia AS2047 Standard
- ☑ Meet Australia bushfire BAL Standard
- ☑ Meet Australia AS2208 Standard
- ☑ Meet Acoustic 42dB
- ☑ Meet Bullet Proof UL752 Standard
- ☑ Meet CSA AAMA 101 NAFS Standard
- ☑ Meet Florida Products Approval
- ☑ Meet USA NFRC Standard

INTRODUCTION

1 Export Factory with CNC Auto Production Line

SuperHouse
江苏叔伯屋门窗系统有限公司
SUPERHOUSE(JIANGSU) WINDOWS SYSTEM LLC

SP146

SLIM SLIDING DOOR SPECIAL LINE





Superhouse SP146 series with 2cm thickness simplification profile and with a large view. Abandon the traditional big and heavy sliding door frame, the minimalist push and pull is more close to the natural environment nearly.
Higher glass to aluminum frame ratio,heat insulation performance system effectively improved.
Hidden under the rail- with roller bearing, single panel load up to 500kgs. It can be made 3000mm by 3000mm per panel.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	146mm
Profile Depth	Frame/Sash	Refer to detail drawing
Depth of glass groove		
Glass Thickness		

PERFORMANCE

Thermal Insulation	U≤2.4 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	500 pa
Security Level	

SP86

BULLET PROOF SPECIAL LINE



Superhouse SP86 bullet proof system meet UL752 standard and Florida USA product building approval. The special design with reinforce steel plate and bullet proof glass. Which is popular use for hurricane area and public like embassy, army area and bank.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	Refer to detail drawing
Profile Depth	Frame/Sash	Refer to detail drawing
Depth of glass groove		
Glass Thickness		

PERFORMANCE

Thermal Insulation	U≤1.1 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	900 pa
Security Level	

SP100

HINGE DOOR COMMERCIAL



Superhouse SP100 hinge door is classic model. It can be high threshold or low threshold or without threshold. Stainless steel handle for option. Normally use for commercial area such as shop entrance door. It aslo can be escape door.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	Refer to detail drawing
Profile Depth	Frame/Sash	Refer to detail drawing
Depth of glass groove		
Glass Thickness		

PERFORMANCE

Thermal Insulation	U≤3.4 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	600 pa
Security Level	

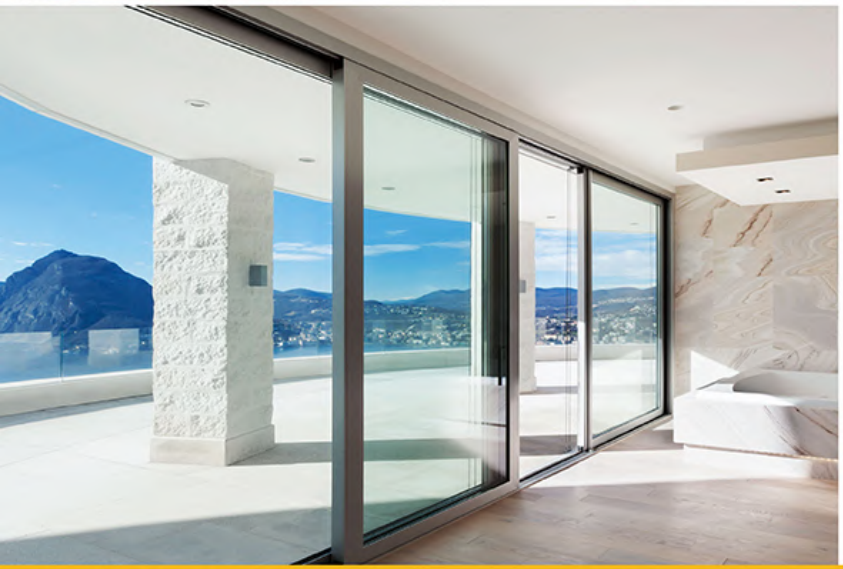

SP100

SLIDING DOOR COMMERCIAL



SP100 Sliding door system, it can be equipped with triple glass to get better sound insulation and energy saving.
This system is equipped with heavy duty and it can be load max.
300kg weight. It could create smoother and more reliable operation experience for users during the repeated opening and closing.
Available with stainless steel mesh and could meet 600pa water panetration.
Popular used in Australia market.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	50mm
Profile Depth	Frame/Sash	130mm
Depth of glass groove		16mm
Glass Thickness		12~30mm

PERFORMANCE

Thermal Insulation	U≤3.8 W/m2K
Acoustic Performance	≤42dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	600 pa
Security Level	

SP150

STACKER DOOR COMMERCIAL



SP150 stacker door system, it could be with triple glass to realize better sound insulation and energy saving. This system is here with heavy duty. It could create smoother and more reliable operation experience for users during the repeated opening and closing. Available with stainless steel mesh and could meet 600 pa water penetration. Popular used in Australia Market.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	50mm
Profile Depth	Frame/Sash	150mm
Depth of glass groove		16mm
Glass Thickness		12~31mm

PERFORMANCE

Thermal Insulation	U≤3.4 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	600 pa
Security Level	

SP115
BI-FOLDING DOOR COMMERCIAL



Superhouse SP115 Bifolding door could meet design of 220,330,431,550,541,633, 651,743 and so on. Also could with retractor flyscreen. It can be make 3000mm high with heavy duty hinge and with striped sash to improve aesthetics sash. Also it is the flagship product in Superhouse product system.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	30mm
Profile Depth	Frame/Sash	115mm
Depth of glass groove		22mm
Glass Thickness		21~42mm

PERFORMANCE

Thermal Insulation	U≤3.4 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	600 pa
Security Level	

SP100
AWNING WINDOW COMMERCIAL



SP100 Chain winder window could be equipped with double or triple glass to realize better sound insulation and energy-saving. This system is here with Australia local 125mm limited opening restrictor. Available with stainless steel mesh or flyscreen. And with Australia standard and with 900pa water panetration and popular used in Australia market.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	50mm
Profile Depth	Frame/Sash	100mm
Depth of glass groove		20mm
Glass Thickness		12~31mm

PERFORMANCE

Thermal Insulation	U≤3.4 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	900 pa
Security Level	

SP130

GLASS LOUVER
COMMERCIAL



Superhouse SP130 louver is popular for Australia market and which could be with the flyscreen and also Stainless steel mesh. Available for 6mm glass and 6.38mm laminated glass. It is the flagship product in Superhosue system. And which pass 150 pa water penetration for the AS2047 Standard.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	25mm
Profile Depth	Frame/Sash	130mm
Depth of glass groove		16mm
Glass Thickness		6mm

PERFORMANCE

Thermal Insulation	U≤4.4 W/m2K
Acoustic Performance	≤35dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	150 pa
Security Level	

SP65T

Awning
Casement
SUPER SERIES



SP65T system is excellent heat insulating function, through the adoption of 24mm thermal insulation aluminum profile, it could keep the U-value less than 1.6 W/m.K. It could not only satisfy users' strick requirement on physical function, but also realize various segmentations of windows and doors. It is popular on North American Area. Flagship product in Superhouse system

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	30mm
Profile Depth	Frame/Sash	65mm
Depth of glass groove		27mm
Glass Thickness		48mm

PERFORMANCE

Thermal Insulation	U≤1.6 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	900 pa
Security Level	

SP80T

Awning
Casement
STAR SERIES



Superhosue P80 system is excellent heat insulating function, through the adoption of 39mm thermal insulation aluminum profile, it could keep the U-value less than 1.1w/m.k. It could not only satisfy users strict requirement on physical function, but also is the flagship product in superhouse system. Comply with AAMA CSA WDMA101/I.S.2/A440-11.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	30mm
Profile Depth	Frame/Sash	79mm
Depth of glass groove		27mm
Glass Thickness		61mm

PERFORMANCE

Thermal Insulation	U≤1.4 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	900 pa
Security Level	

SP80T

HINGE DOOR STAR SERIES



Superhouse P80 system is excellent heat insulating function, which belong to our star system with very high quality and with kick plate. It could realized inwards opening, outwards opening, low threshold and high threshold. Also there are different kinds of hardware for choose and it could meet C and U groove with multi point locking system.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	50mm
Profile Depth	Frame/Sash	80mm
Depth of glass groove		27mm
Glass Thickness		48mm

PERFORMANCE

Thermal Insulation	U≤1.4 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	600 pa
Security Level	

SP75T

BI-FOLDING DOOR STAR SERIES



Superhouse SP75T bifold doors, or folding sliding doors if you prefer, are a modern and innovative design statement that can transform an ordinary room and make it a feature of the house. It can be low threshold and high threshold. Available in a number of configurations using between 2 and 8 door leaves.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	36mm
Profile Depth	Frame/Sash	75mm
Depth of glass groove		29mm
Glass Thickness		51mm

PERFORMANCE

Thermal Insulation	U≤2.4 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	600 pa
Security Level	

SP153T

Lift&Sliding door STAR SERIES



Superhouse SP153T system is a sliding and lift&sliding door wiellent thermal insulation. The perfect design max. glass area and enhances comfort, which system has a small threshold scheme to facilitate access to building. The lift and sliding door can accommodate large size glass door and bear up to 400kg which meets the requirement of anti theft performance.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	64mm
Profile Depth	Frame/Sash	153mm
Depth of glass groove		26mm
Glass Thickness		53mm

PERFORMANCE

Thermal Insulation	U≤1.6 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	600 pa
Security Level	

SP239T

Lift&Sliding door
STAR SERIES



Superhouse SP239T system is a sliding and lift&sliding door woollen thermal insulation. The perfect design max. glass area and enhances comfort, which system has a small threshold scheme to facilitate access to building. The lift and sliding door can accommodate large size glass door and bear up to 400kg which meets the requirement of anti theft performance.

TECHNICAL DATA

Visible width (Outside)	Frame/Sash	64mm
Profile Depth	Frame/Sash	239mm
Depth of glass groove		26mm
Glass Thickness		53mm

PERFORMANCE

Thermal Insulation	U≤1.6 W/m2K
Acoustic Performance	≤45dB
Air Tightness	0.4
Wind Load Resistance	≥0.5Kpa
Water Penetration	600 pa
Security Level	

Application
Coner Sliding

Application
Stack door



Application
Energy-Saving
System

CAMBRIA
1 Dr

CAMBRIA
CAMBRIA

Application
Cambria hotel

Projects
Highgate Cemetery

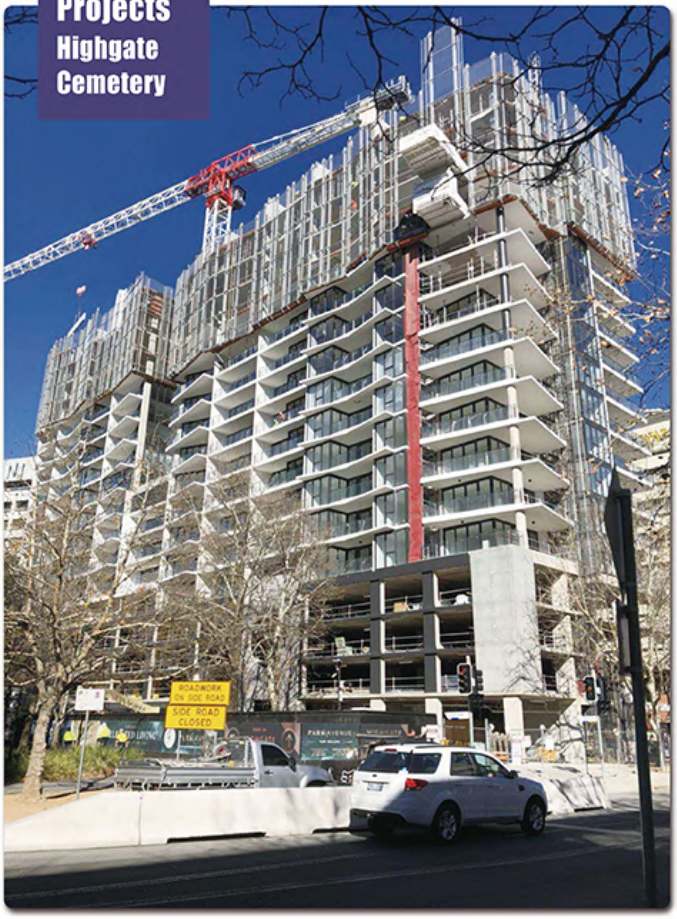

Projects
UK apartment



Projects
Miami hotel



Projects petrol station



FACTORY VIEW

For pursue outstanding quality, we import national standard high quality auto-machines



Dust-Free Plant

AUTO-MACHINES

FACTORY VIEW

Packing based on iron and tested by SGS , Suitable for long sea transportation

SGS Approved Packing

Meanwhile, under international standard quality system, which helps our quality better than competition‘s

Dust-Free Plant

Certificate



高新技术企业

证书

企业名称：[illegible]

证书编号：GR202232008496

发证时间：2022年12月12日

有效期：三年

批准机关：

High Tech Certificate

NFRC Product Certificate of Authorization

NOTICE OF PRODUCT CERTIFICATION

NFRC North American Standard

Certificate



AGGA

CERTIFICATE OF MEMBERSHIP 2019

Shanghai Superhouse Building Material Co., Ltd

GLASS & WINDOW

GOLD

2023-2024

AGWA ACCREDITED COMPLIANCE CERTIFICATE

Shanghai Superhouse Building Material Co., Ltd

STANDARDSMARK LICENCE

Shanghai Superhouse Building Materials

SAI GLOBAL

Australia Standard

FLORIDA BUILDING CODE 6TH EDITION (2017)

NOTICE OF ACCEPTANCE (NOA)

Hurricane NOA Standard

APPROVED SUPPLIER

ASSA ABLOY

CMECH 希美克

ICI Dulux

Sobinco OPENS YOUR LIFE

GEZE

SIEGENIA brings spaces to life

APPROVED SUPPLIER

Doric

REYNAERS aluminium

E HANDLE

AkzoNobel

HOPPE

weiss

Tel：0086-21-58223048
Fax：0086-21-58220631

SHANGHAI SUPERHOUSE BLDG MATL CO.LTD

Office Add:
Level 5, Building 10,
No.8666 Hunan Road,
Pudong New Area, Shanghai,P.R.China

Superhouse (Jiangsu) Window System LLC

Factory Add:
No. 12 Haihong Rd,
Qidong Binhai Industrail Zone,
Nantong City, Jiangsu Province P.R.China

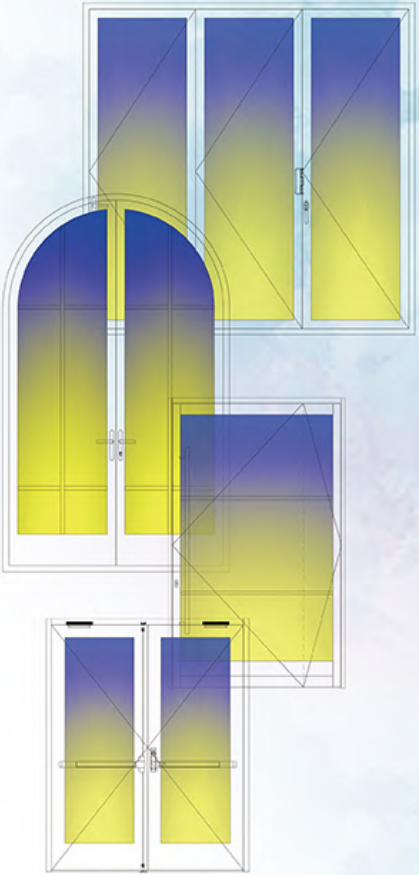isuperhouse.com
info@isuperhouse.com