


# R-VALUE Standard 16"x16"



**ASTM C578 minimum standard is 3.6R per inch**  
**Mono Slab EZ Form tests at 3.85R per inch**

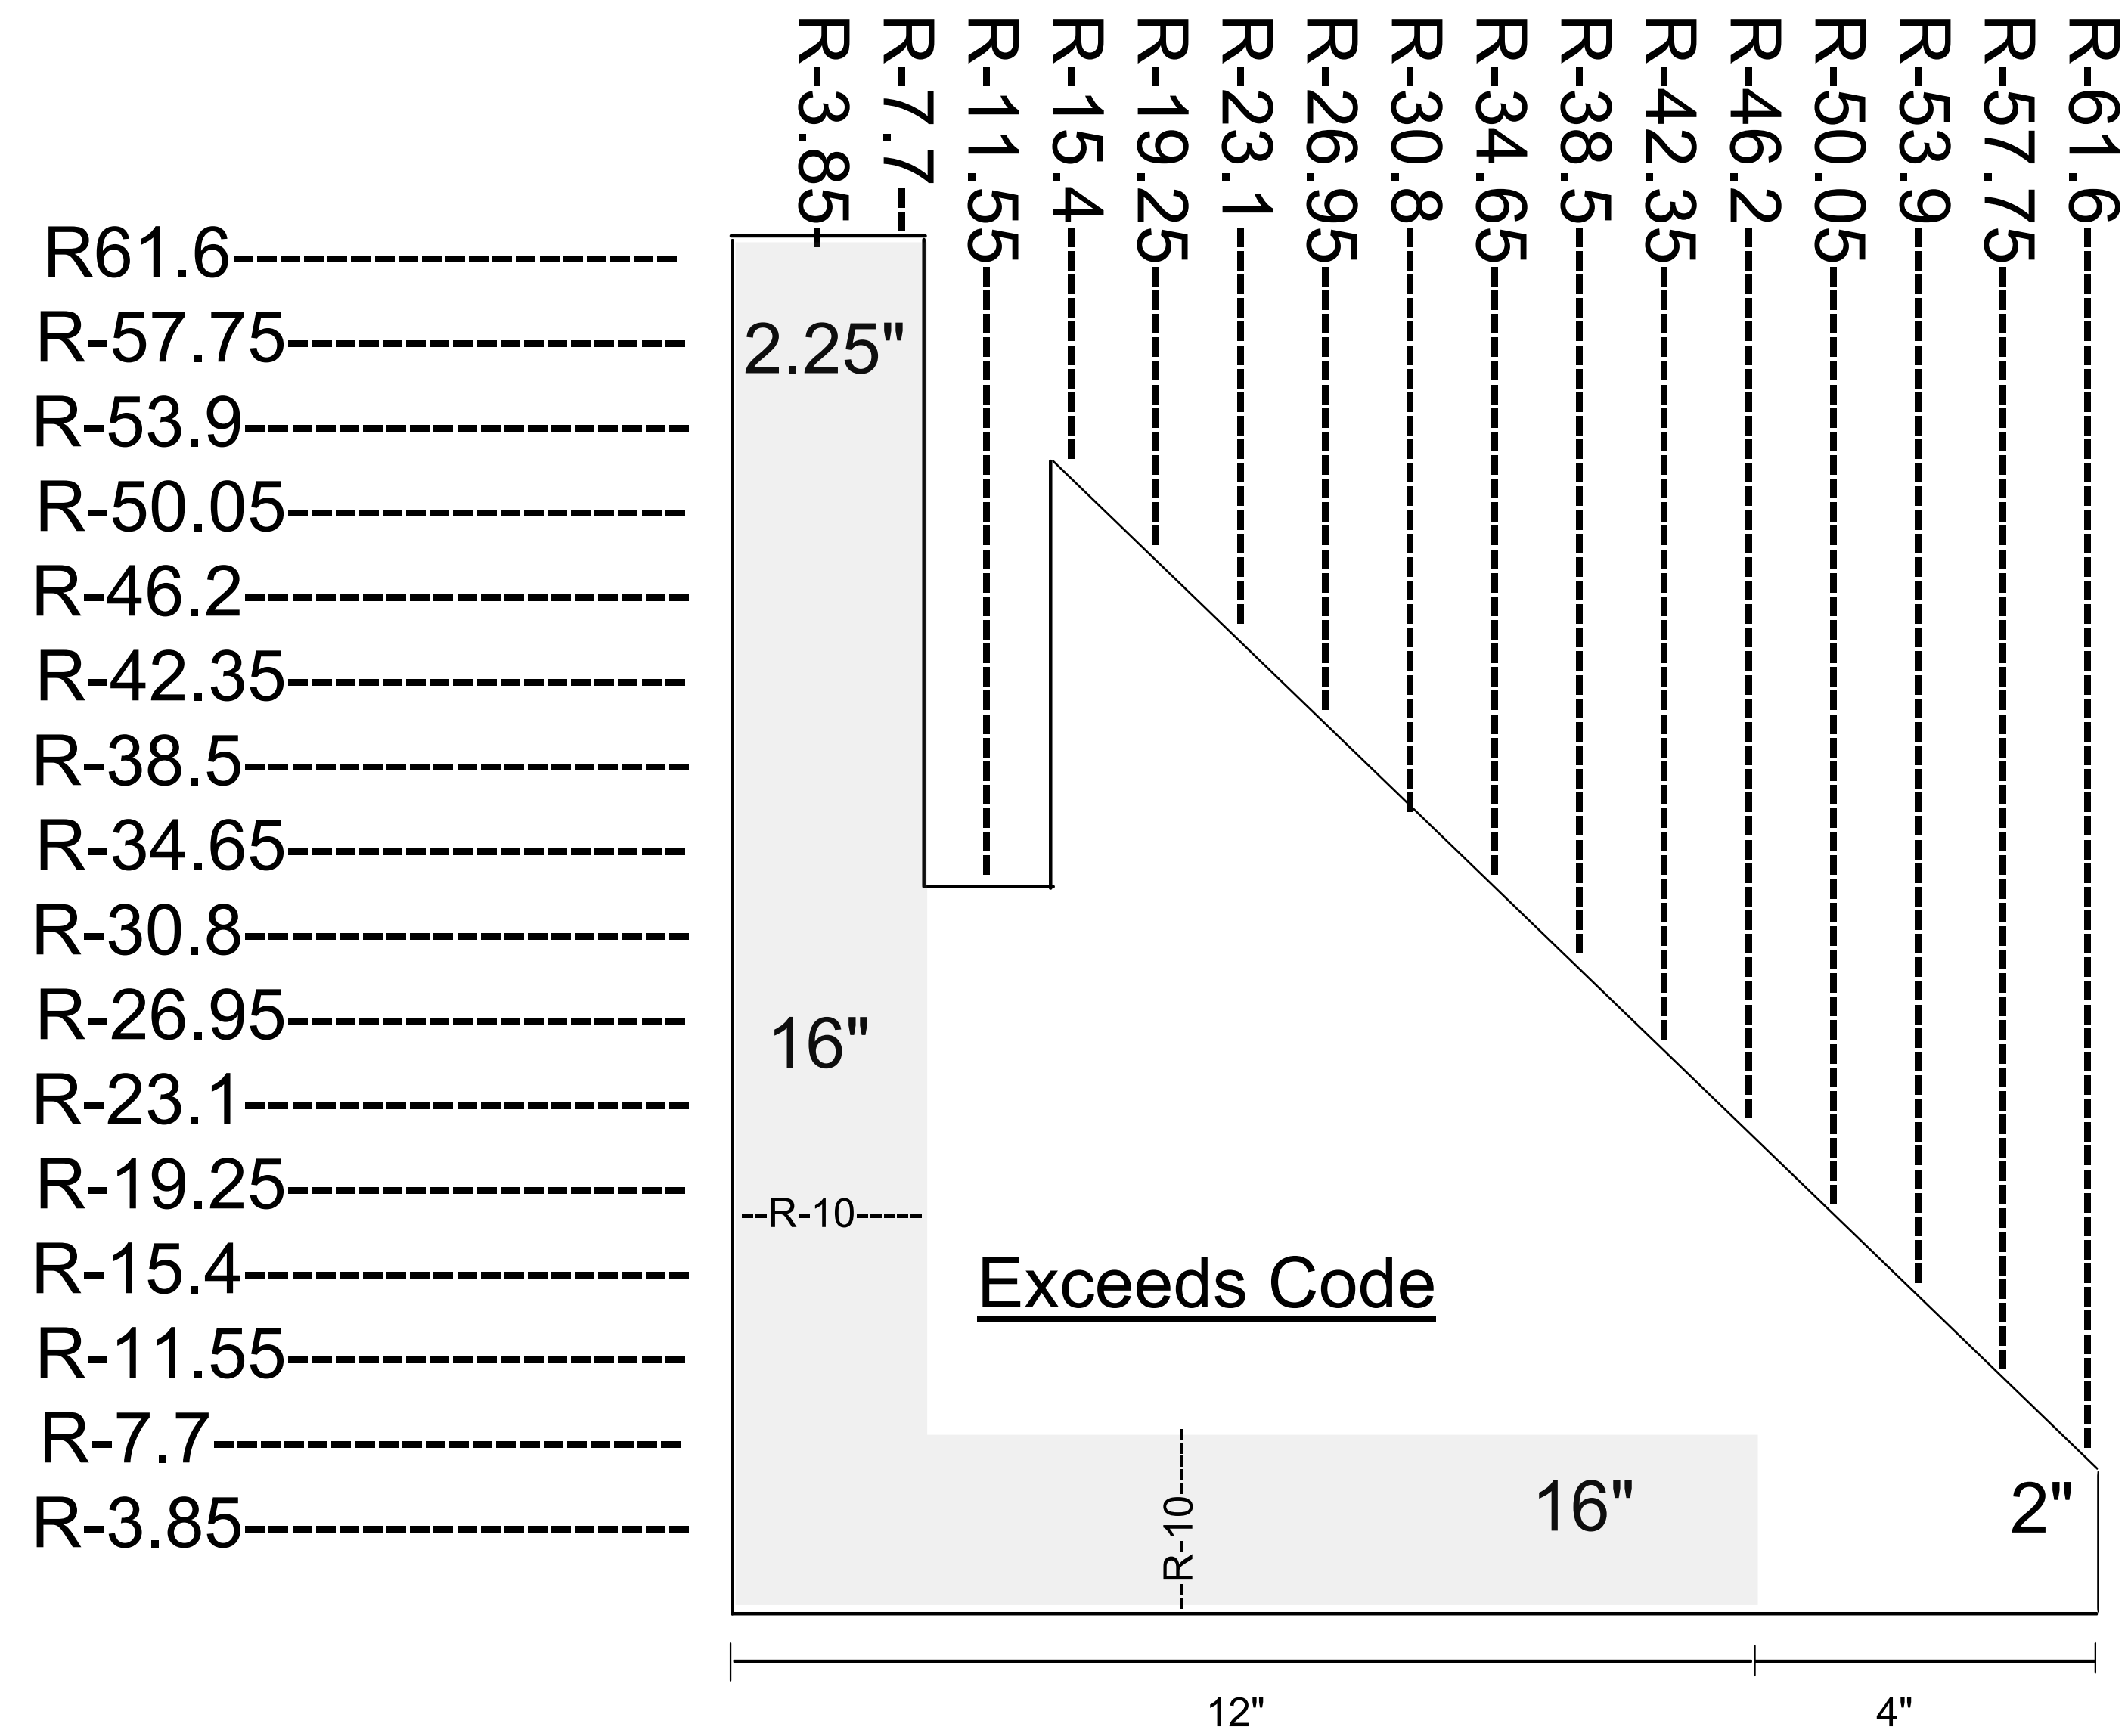

REVISION DATE	DESCRIPTION
9/14/2018	Updated