





**FLAT ROOF  
SKYLIGHTS  
AND HATCHES**

**DXW - walkable skylight**

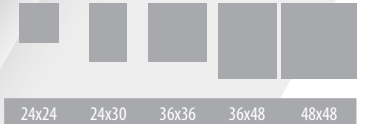


**CURB MOUNTED FIXED SKYLIGHT **FXC****

- Infinity glass - virtually seam-free flat surface
- 360-degree orientation on sloped or flat roof
- A modern, trouble-free design helps with water run-off.
- White finished, PVC frame interior
- Internal and external accessories available before or after skylight's installation.
- Suitable for roof with a pitch between 0-60 degrees





FXC

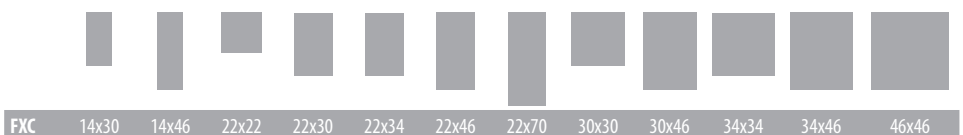

FXC 14x30 14x46 22x22 22x30 22x34 22x46 22x70 30x30 30x46 34x34 34x46 46x46




INVITE  
THE LIGHT



## FLAT ROOF WINDOWS TYPE F

- An abundance of natural light. The window's profile have a secure glazing area that is up to 16% greater than those of competitors.
- The frame of the flat roof window is constructed from multi-chamber PVC profiles filled with insulating material.
- The external glass is laminated reflecting the sun rays while the internal pane is anti-burglary Class P2A.
- In addition to standard sizes, the type F window is available in custom sizes (from 24"x24" to 48"x87") to suit may retrofits.
- High energy-efficient DU6 triple-pane glazing (U-value=0.12 BTU/h°F) and DU8 quadruple-pane glazing (U-value=0.11 BTU/h°F) to choose from.
- Windows can be fitted with internal and external blinds to ensure shade and protect interiors from overheating.


DEF, DMF, DXF	22x22	22x30	22x46	30x30	46x46
---------------	-------	-------	-------	-------	-------



## FLAT ROOF ACCESS SKYLIGHT DRF

- Energy-efficient design using DU6 triple-pane glazing and insulated, multi-chamber PVC frame to achieve low U-value=0.13 BTU/h°F.
- Safe and convenient access to a flat roof. Specially-designed hinges and a gas springs keep the window open at 80 degrees.
- An anti-slip coating covers the exterior of the window for safe access to the flat roof.
- Excellent soundproofing performance
- Flat glass is impact resistant for durability.
- Window can be fitted with internal and external blinds to ensure shade and protect interiors from overheating.

DRF	30x30	30x36	36x36	36x48
-----	-------	-------	-------	-------



## ROOF HATCH DRL

- Energy-efficient design with insulated door and frame delivers U factor = 0.12 BTU/h<sup>2</sup>F
- Available sizes can be combined with FAKRO attic ladders for invisible access to the flat roof.
- Insulated, multi-chamber, PVC frame with a high-performance seal ensure the hatch is suitable for energy-efficient projects in a variety of climates.
- Gas spring-assisted opening stays open at 80 degrees.
- An anti-slip surface covers the base for safe access to the flat roof.

DRL	30x30	30x36	36x36	27 1/2 x 61 1/2
-----	-------	-------	-------	-----------------