

Pro-Flash[™] BUILDING ENVELOPE SEALS

Professional, Fast & Economical



Non-Breathable and Flexible

Weather Tight Elastomeric Seal


Score lines allow for multiple pipe sizes

- Easily integrates into roof assembly
- Protects against leaks caused by damaged/old roof boots
- No caulking or taping
- Durable polyethylene with UV protection


US PAT: 9,140,002 & 9,109,359

Patent Pending Technology


Installation:

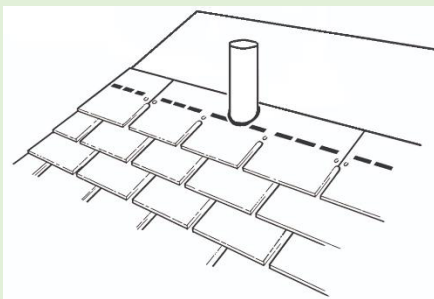

1. Install underlayment and shingles around vent pipe

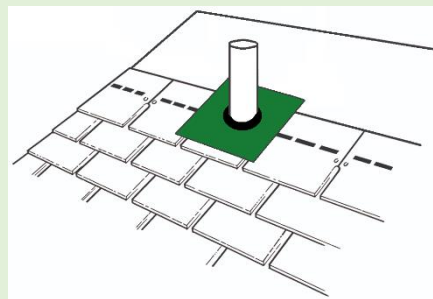

2. Install Pro-Flash over vent pipe

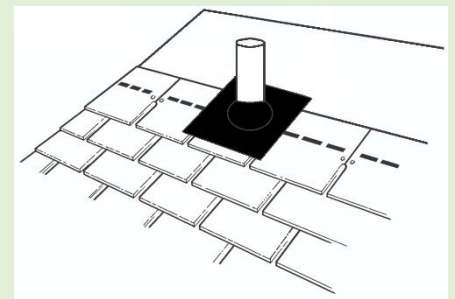

3. Install roof boot over vent pipe and Pro-Flash. Shingle remaining section

For more information contact: 1-877-734-8691 or visit:
www.pro-flash.com

