SINCE 2010

SINCE 2010

SINCE 2015

SINCE 2022





## **Guangdong YONGFENG LIHUA Shading Technology Co., Ltd.**

• 6<sup>th</sup> Floor, Chengzhi Building, Haiwu Road, Guicheng Street, Nanhai District, Foshan City, Guangdong, China



Nature lover



OUTDOOR SHADING SOLUTIONS PROVIDER


#### PRODUCT INTRODUCTION

Aluminium shutters are modern indoor and outdoor energy-saving sunshade product that perfectly comebine with practicality, protection and decoration function.

- Aluminium 6063, a green building material, which comply with policy of carbon peaking and neutrality, supporting the development of green buildings;
- ◆ Fixed and Operable Blade Options. Operable blade can provide variable control of light and ventilation. When the blades are openning to 90 degrees, the best ventilation is obtained.
- ◆ The airfoil double-layer blades improve bending strength, ensuring that the aluminium shutters have little deformation when impacted by external force, and achieve protection function.
- ◆ The ratio of visible & direct sunlight transmittance and UV transmittance all are 0.
  Blocks out UV and sunlight transmission.



Sunlever GB/T 2680-2021 test result: the shading coefficient is as low as 0.11, reaching an excellent level 4 (0-0.2).

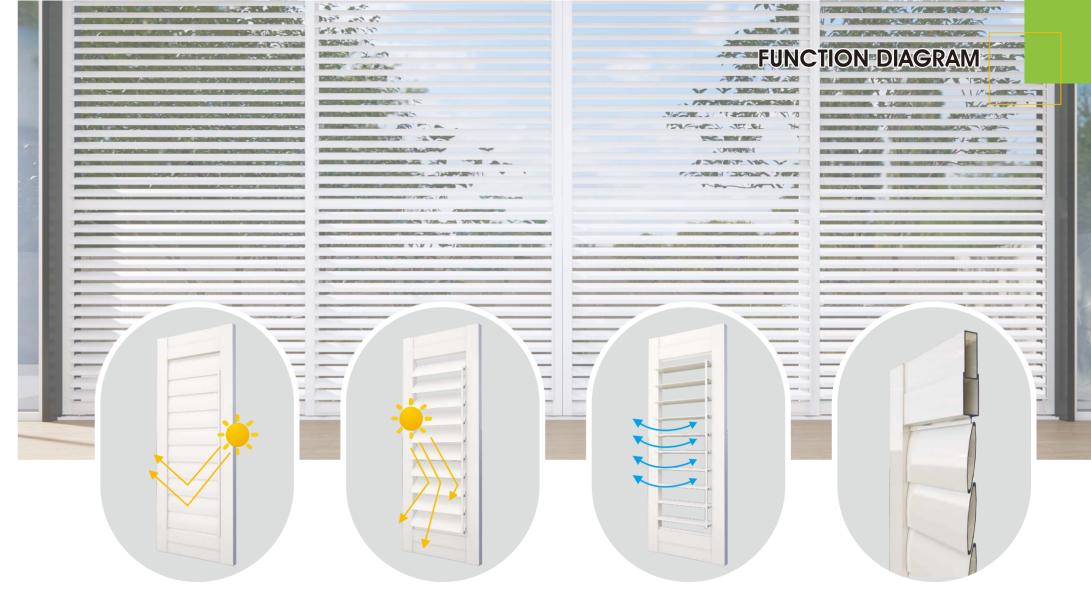

All aluminum alloy 6063 material; Shading and heat insulation. Operable blade;
Openning and closing
0°~180°;
Dimming by refraction.

When blades openning to 90°;

Ventilation rate up to 80%; Create good ventilation condition. Airfoil double-layer blades; Made by aluminium 6063 Durable; Anti collision and theft,

www.sunlever.net


APPLICATION

## **APPLICATION**




## Louvered Pergola

Aluminium louvered pergola matched with aluminium shutters, to create the comprehensive all-weather sunshade leisure space.







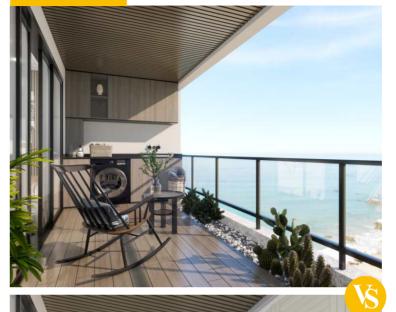





## Balcony

ue to the changeable weather and no shelding, the balcony ilization rate is quite low. Aluminium shutters can provide exiable shelding. By providing practicality that without fecting the view of outdoor scenery.

• 03 WWW.SUNLEVER.NET ♦ 04 • • 04


**APPLICATION** 


### **APPLICATION**

### **Room Divider**

Sliding or bi-folding aluminium shutters can use as moveable room divider. Free conversiton between large and small space. Solve the problem of wall opacity and glass excessive light transmission. Can achieve divider, protection, shaiding, dimming, ventilation, privacy and beauty function at the same time.



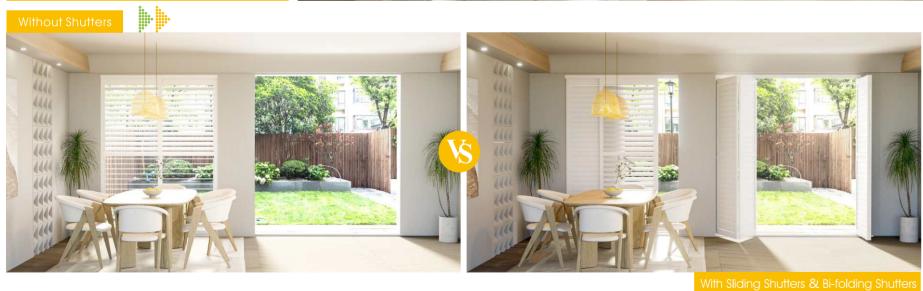

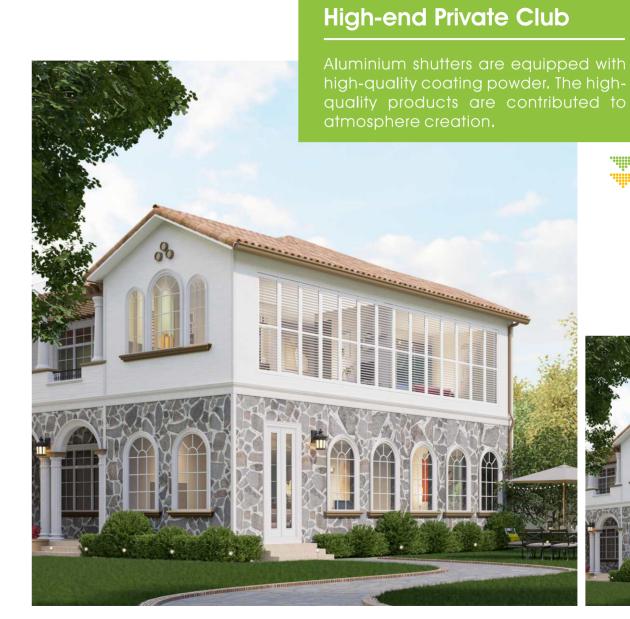

Without Shutter



**APPLICATION APPLICATION** 



### Terrace Area Extending From The Building



## High-class Office Building

The simple, high-end interior design and the comfort of light adjustment are not only a reflection of taste,








WWW.SUNLEVER.NET • 08

## **APPLICATION**

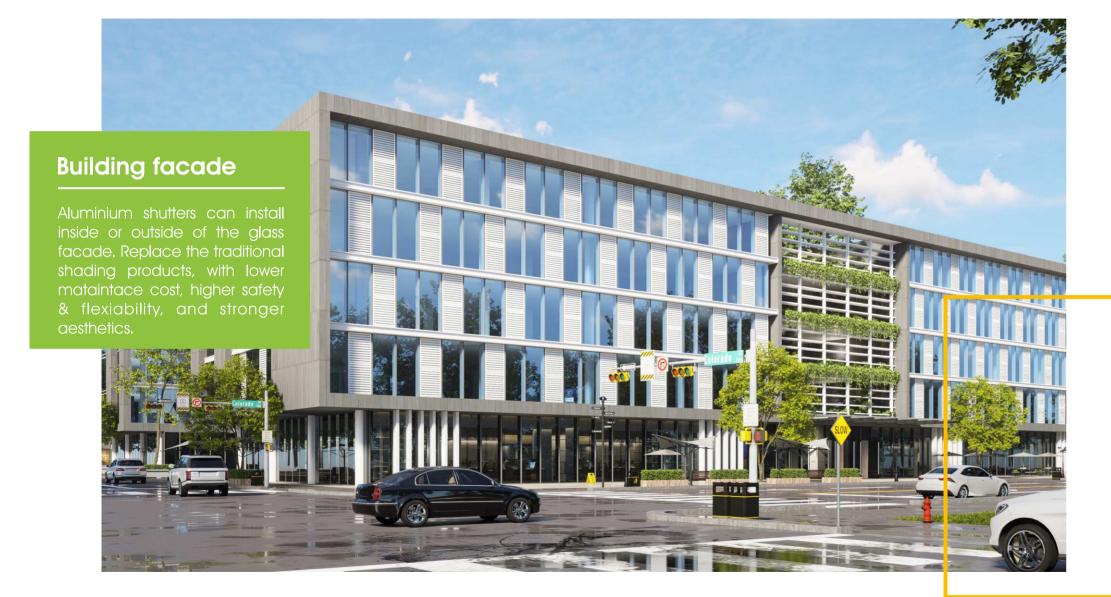








www.sunlever.net

## PRODUCT STYLE AND APPLICATION CASES




# PRODUCT STYLE AND APPLICATION CASES

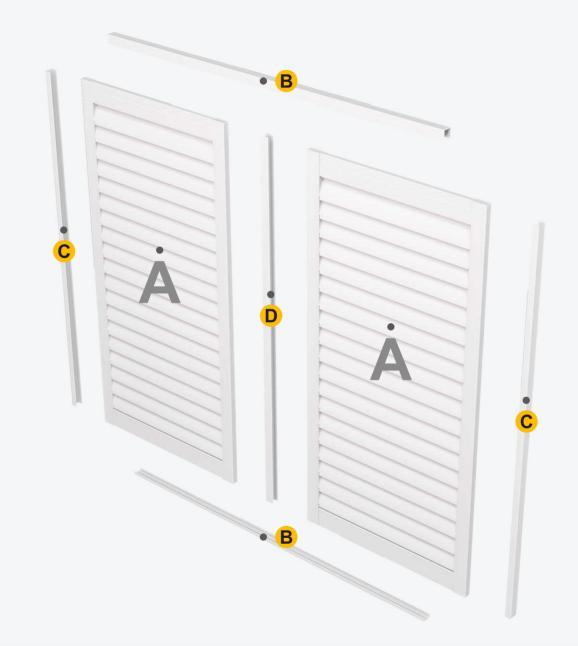









C Left &right U-channel



D H-channel




\*\*\* 11 WWW.SUNLEVER.NET

## PRODUCT STYLE AND APPLICATION CASES


## Sliding Shutters

Single panel dimension: 400mm-1350mm Numbe of tracks: Single, double, triple or others Standard configuration: Rolling sliding system Optional Accessory: Stainless steel flush bolt



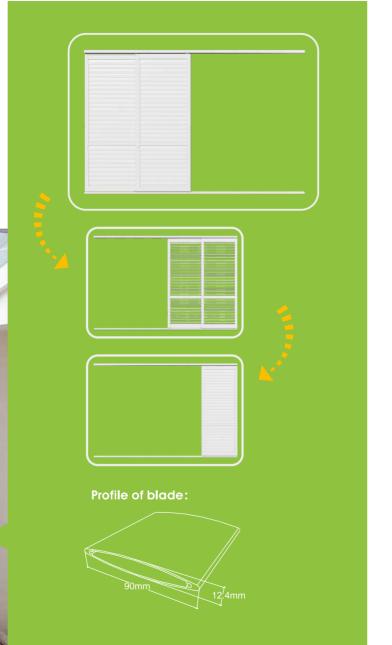

## PRODUCT STYLE AND APPLICATION CASES

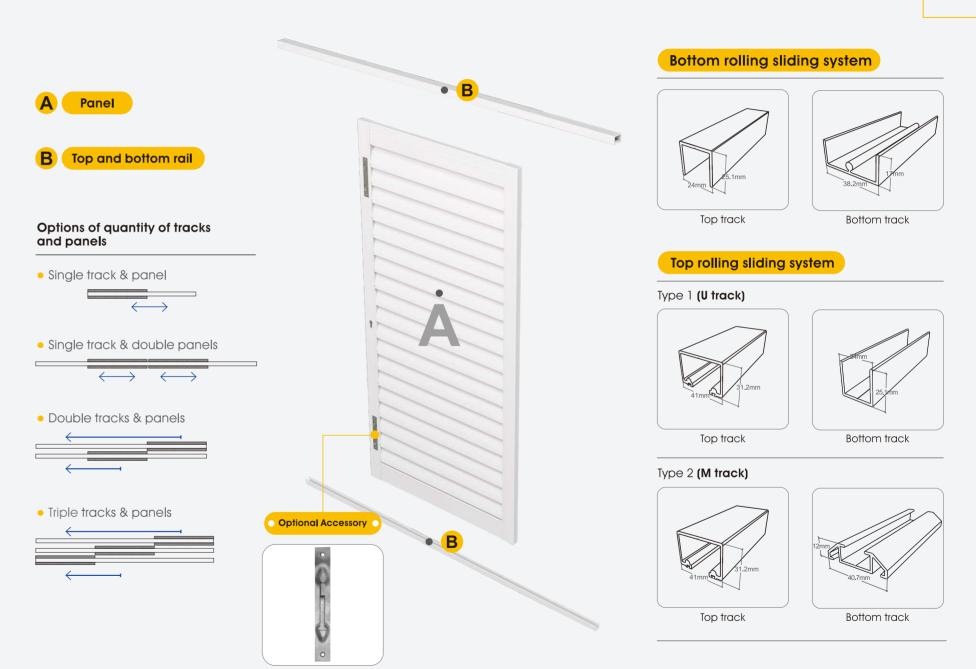

Stainless steel flush bolt

WWW.SUNLEVER.NET

WWW.SUNLEVER.NET

#### PRODUCT STYLE AND APPLICATION CASES



### Bi-folding Shutters


Single panel dimension: 400mm-1350mm

Folding direction: All folded to one side / folded from the middle to both sides / special requirements.

Standard configuration: Aluminum hinge, pivot set, carrier system Optional Accessory: Stainless steel flush bolt, stainless steel hinge



#### PRODUCT STYLE AND APPLICATION CASES

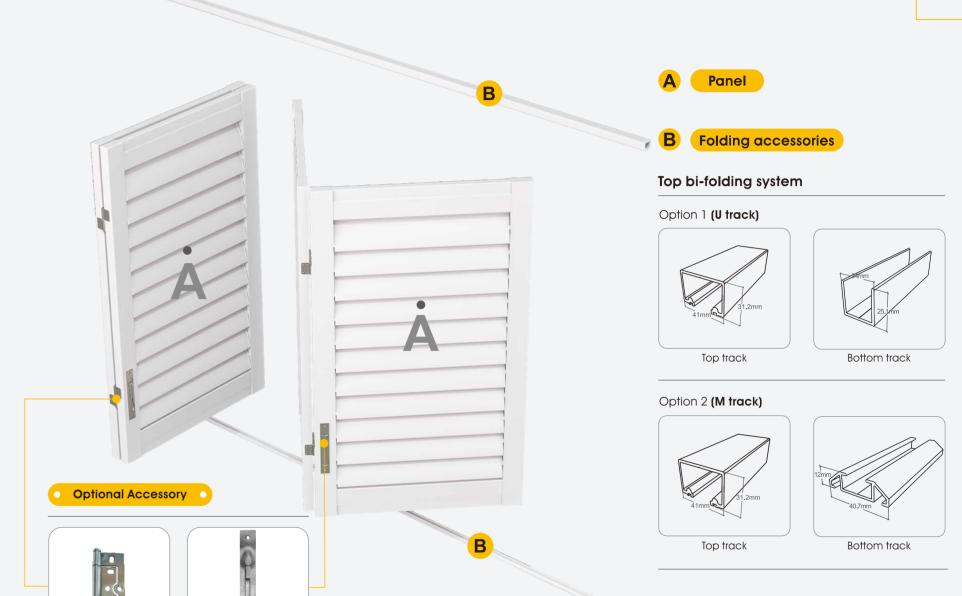

Stainless steel flush bolt

Stainless steel hinge

• 15 www.sunlever.net


## PRODUCT STYLE AND APPLICATION CASES




## • Hinged shutters •

Single panel dimension:400mm-800mm

Optional Accessory: Stainless steel handle lock, stainless steel hinge

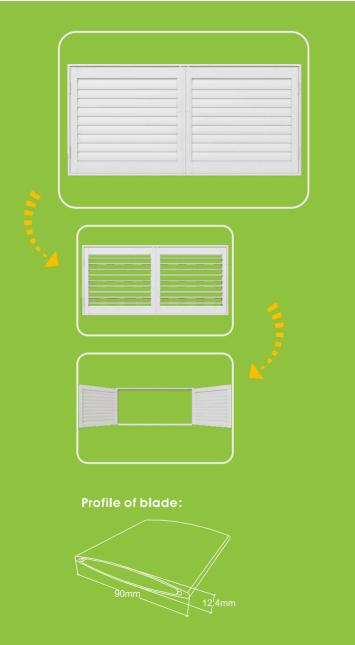

## PRODUCT STYLE AND APPLICATION CASES

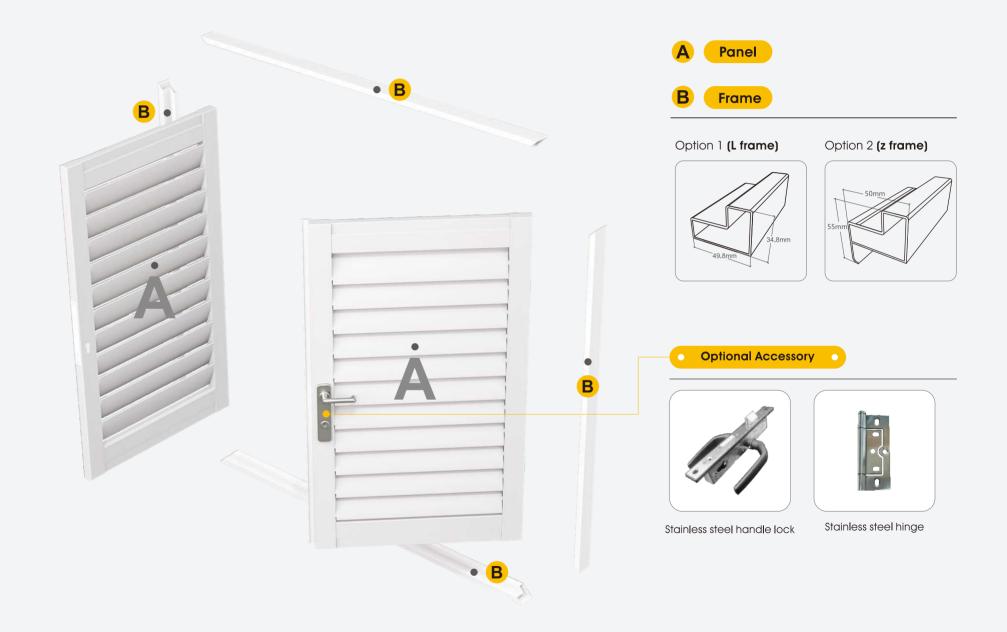

WWW.SUNLEVER.NET • 18

STANDARD COLOUR **MEASUREMENT** 

#### Surface treatment warranty of 10 years

#### Powder coating surface treatment















Gloss White YFS11002

Matte White YFS13001

Silver Gray YFS03001

Light Gray YFC32021

Dark Gray YFC32020

Matte Black YFC80004

#### **Wood Grain Color**



OAK YFCM0068N

The color is for reference only, please prevail in kind.

\* Remarks: If used with our pergola, the color of the shutters can be consistent with the standard color of pergola.

Measuring method: top/middle/bottom, left/middle/right points (measuring H1, H2, H3, W1, W2, W3, total of 6 sizes)



\* Remarks: For installation in the opening, select the minimum value of width and height; For installation outside the opening, select the maximum value of width and height; If it is not square, it is best to contact our company to provide a solution.

• 19 www.sunlever.net www.sunlever.net • 20 REAL CASE























WWW.SUNLEVER.NET • 22 WWW.SUNLEVER.NET

REAL CASE



















WWW.SUNLEVER.NET • 24

PROJECT CASE

PROJECT CASE










Project Name: Arena Buliding

Completed: 2014

Location: Queensland, Australia

Application: Apartment Building

Floor Number: 12

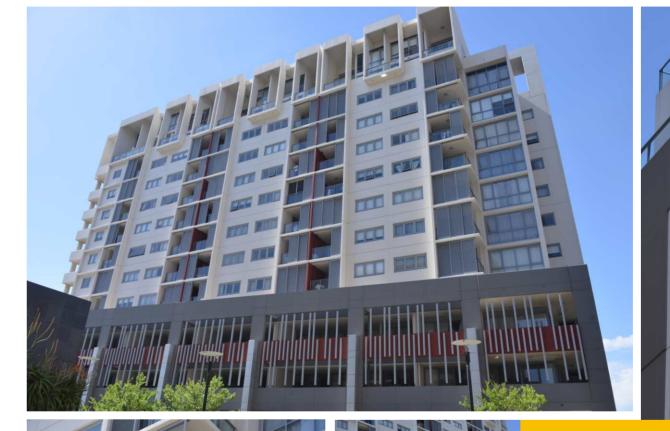



ocation: Queensland, Australia

Application: Apartment Building

Floor Number: 10



## PRODUCTION BASE

## 40,000 + m<sup>2</sup> Production Plant









ADD:
Xiebian Industrial Park, Dali Town, Nanhai District, Foshan City,
Guangdong, China

www.sunlever.net • 28 • 27 www.sunlever.net

# OFFICE & SHOW ROOM

## 1000 + m<sup>2</sup> Indoor Showroom





## 1000+m² Outdoor Showroom



\* 29 WWW.SUNLEVER.NET