


THE FUTURE IS NOW

Installation & Full Break Down on Back

SmartClick is the future of tool-free, permanent fittings for PE-RT and PEX tube, installing up to 35% faster than any other fitting system available today. You create a permanent connection when you hear, feel, and see the "click."

These fittings are crafted from a durable PPSU polymer, feature spring steel clamps, and utilize two EPDM o-rings on each side. This design ensures a secure and reliable connection that endures the lifespan of your water system. The SmartClick system has undergone rigorous third-party testing and is ASSE 1061 certified for behind-the-wall applications. To further guarantee performance, Legend offers a 30-Year SmartClick System Warranty.



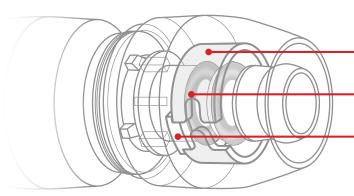

Two EPDM O-Rings

Spring Steel Clamp

Retention Wedge





INSTALLING SMARTCLICK®

STEP 1

CUT the PE-RT or PEX tube straight and square using a sharp tube cutter.





STEP 2

INSERT the tube into the connector and push - there's no need to mark insertion depths on the tube.

STEP 3

When you hear the CLICK, the spring steel clamp has snapped closed, securing the connection.





STEP 4

The steel clamp resists changes in temperature and pressure, ensuring the connection remains secure.

Materials:

- PPSU Body Insert
- Polycarbonate Shell

Temperature & Pressure Ratings:

- 200 PSI up to 200°F
- Cold Working Pressure (CWP): Caution! Exceeds the pressure rating of PE-RT and PEX tubing.

Certifications:

- Third-Party Certified
- ASSE 1061
- ANSI/NSF 14
- ANSI/NSF 61
- ANSI/NSF 372 (Brass Only)
- Uniform Plumbing Code
- International Plumbing Code
- International Residential Code
- · National Plumbing Code of Canada
- California Plumbing Code
- City of Los Angeles Plumbing Code
- · Code of Massachusetts Regulation 248 CMR 10.00: Uniform State Plumbing Code



FULL BREAK DOWN

